
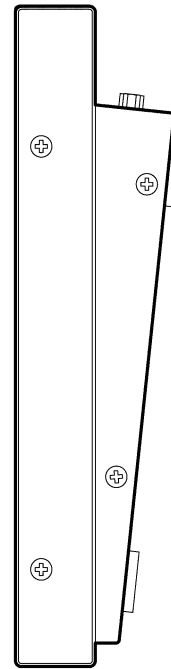
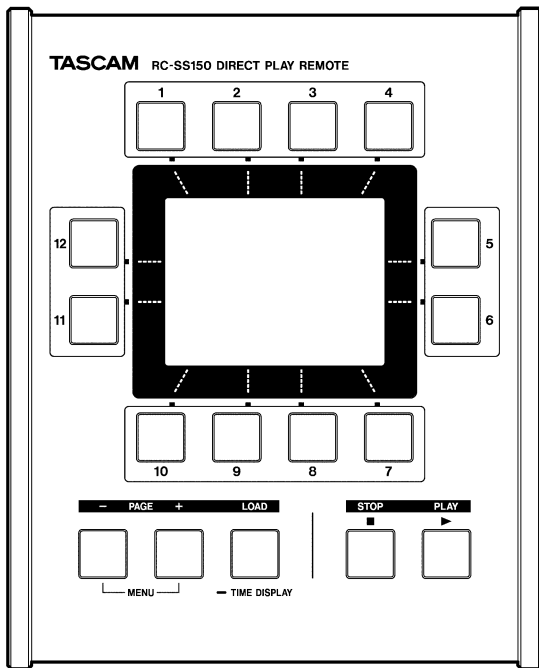


Product Spec Sheet
DIRECT PLAY REMOTE
RC-SS150

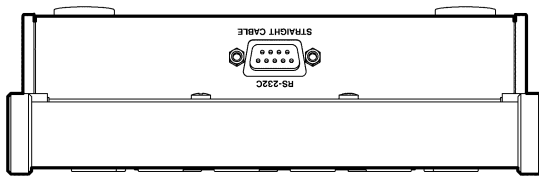

■ Specifications

General


- Power supply voltage
DC12V (supplied by SS-R250N/SS-CDR250N unit)
- Power consumption
1.30W or less
- Dimensions
176 x 59 x 215mm (width × height × depth)
- Weight
1.1kg
- Operating temperature range
5-35° C /41-95° F

•Connection (RS-232C serial port)

Connector: 9-pin D-sub (female, inch-standard)
 Connection cable: 9-pin D-sub straight cable (15m or less)
 Transmission speed: 57600 bps
 Data bits: 8-bit
 Parity: None
 Stop bit: 1
 No flow control

Pin number	Signal name
1	NC
2	TxD
3	RxD
4	NC
5	Ground
6	NC
7	NC
8	NC
9	Power +12V

■ Dimensional drawings

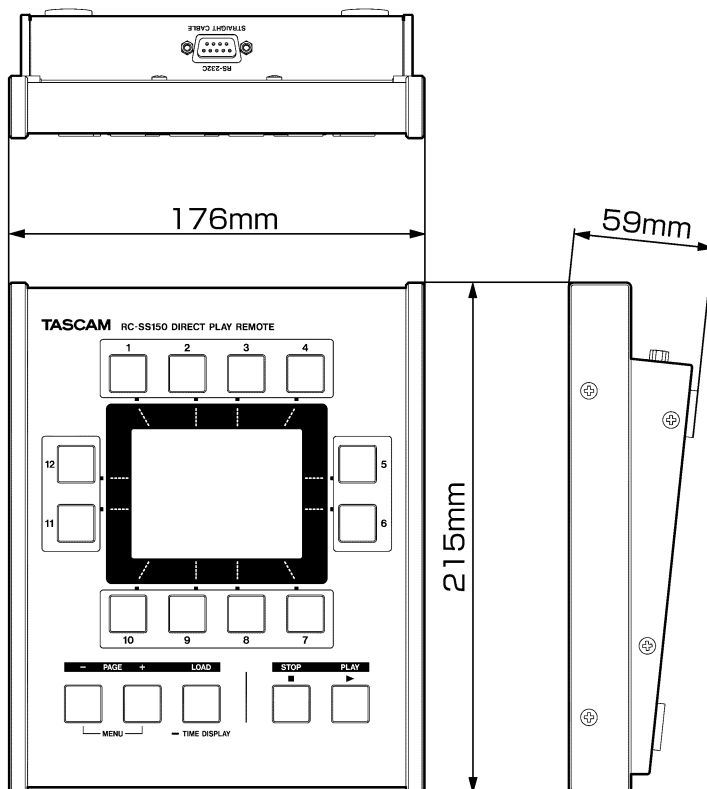

※TASCAM is trademark of TEAC CORPORATION, registered in the U.S. and other countries.
 ※Other company names, product names and logos are the trademarks or registered trademarks of their owners.
 ※Specifications and appearance are subject to change without notice.
 ※All information included in this document is as of Jan, 2017.