

FULLU-RK19 fitting note

The FULLU-RK19 kit allows for modular 19" rack mounting of the DX-HUB and the GPIO interface.


The DX-HUB and GPIO can be mounted:


- Left side of rack, front or rear facing
- Right side of rack, front or rear facing
- Two DX-HUB, two GPIO or one DX-HUB and one GPIO, front or rear facing

Check the contents

Item Number	Description	QTY
AA11081	JOINING PLATE	1
AA11082	RACK EAR	2
AA11083	RACK EAR (1/2 U)	1
AB9037	M3 SCREW TORX®	14

Tools required


Pozi P3 

Torx® T8 

Fitting the rack ears

1. Secure the joining plate to the bottom of the unit/s. Use 3x M3 Torx® screws per unit.
2. Secure the rack ears to the sides of the unit/s. Use 4x M3 Torx® screws per side.
3. When using the AA11083 1/2 U rack ear, secure the rack ear to the joining plate using 2x M3 Torx® screws.
4. Use suitable rack screws and washers to rackmount the assembly.

Example configurations

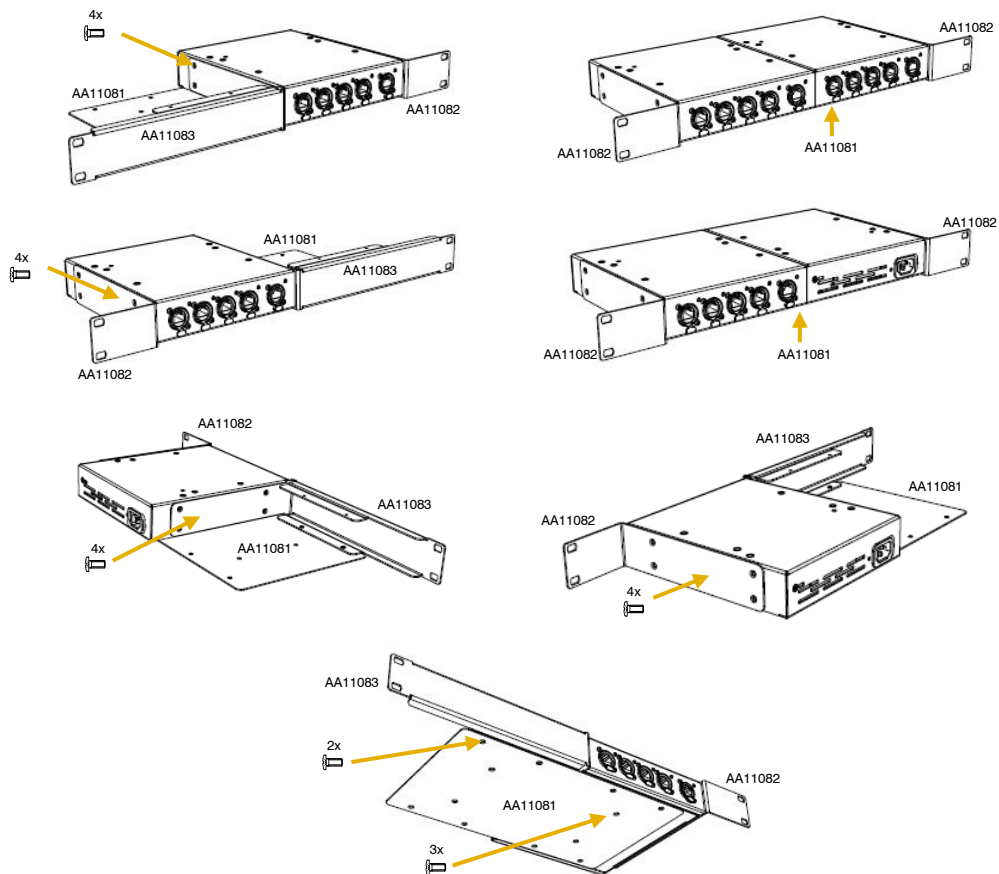

Copyright © 2018 Allen & Heath. All rights reserved.

ALLEN & HEATH

Allen & Heath Limited, Kernick Industrial Estate, Penryn, Cornwall, TR10 9LU, UK

<http://www.allen-heath.com>