


## AMX NMX-DEC-N2622S

4K60 MWC/Dante AV-A & 1080p H.26x Multi-Codec Decoder  
AMX-N26D001 (Stand Alone)

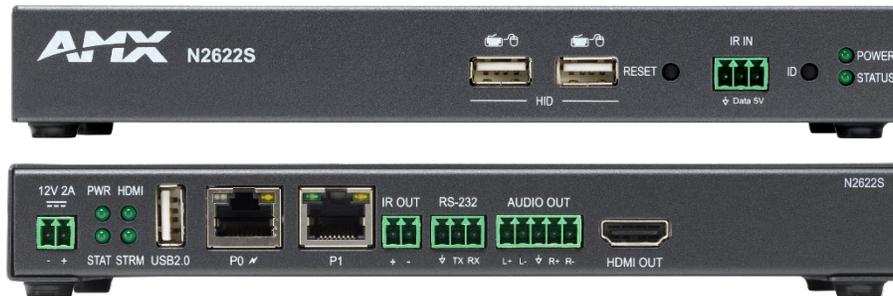

The AMX NMX-DEC-N2622S Multi-Codec Decoder

### Overview

The AMX SVSI NMX-DEC-N2622S is a cost-effective, powerfully robust multi-codec decoder in a stand-alone box form factor. It can decode the high-quality, low-latency 4K60 4:4:4 MWC codec output by N2600 encoders that is ideal for streaming both live video and detailed content in classrooms, meeting spaces, courtrooms, bars, and other applications.

High-compatibility, low-bandwidth 1080p H.26x decoding is also included and perfect for distributing video over congested networks.

N2600S models support our Virtual Network USB 2.0 Hub technology. These models not only support transport of full-bandwidth USB 2.0 signals, but also enable USB device signals from up to 4 decoders to be combined and connected to a single USB host on an encoder. A laptop on the meeting room table can now simultaneously connect to multiple remote USB devices such as a camera near the display and an audio DSP in an equipment closet.

Other key features include video preview images viewable from the built-in web interface or from a touch panel and enhanced support for high-security networks.

The NMX-DEC-N2622S supports Dante AV-A, a standard for AVoIP devices created to allow for the interoperability of multiple devices on the network. With Dante AV-A, the NMX-DEC-N2622S is compatible with Dante Controller, Dante Domain Manager, and Dante Director. All signal routing, configuration, and IT-level management for your audio and video devices can now be managed using the same tools.

Compatible encoders include the NMX-ENC-N2612S Encoder, NMX-ENC-N2612S-C Encoder Card and NMX-ENC-N2615-WP Encoder Wallplate. Alternatively, the NMX-DEC-N2622S can decode a Dante AV-A stream generated by any compatible streaming device or an H.26x stream generated 3<sup>rd</sup>-party devices, N3300 series encoders, N3000 series encoders, or the NMX-WP-N3510 Windowing Processor.



## Features

- Dante AV-A
- High-Quality 4K60 MWC encoding with sub-2ms latency
- High-Compatibility, Low-Bandwidth 1080p H.264 decoding
- Video Preview viewable from the built-in web interface or from a touch panel
- Virtual Network USB 2.0 Hub
- High-security network support and features, including multicast, VLAN tagging, and QoS
- PoE+ powered with low-power mode for energy savings
- HControl
- Open Direct-Control API
- UL2043 – Plenum Space certification

## Specifications

VIDEO	
Digital Video Input	Network video over Ethernet via RJ45 port
Digital Video Output	HDMI 2.0
Formats	Dante AV-A, HDMI 2.0, HDCP 2.3 content protection support
HDR	HDR10+, HDR10, HDR
Progressive Input Resolutions	Supports most common HD resolutions up to 4K60 4:4:4
Output Resolutions	720p, 1080p, 4K60 or input resolution if scaler is disabled
Output Scaling	Note: there are no limitations when upscaling. A 4K60 signal can be downscaled to 1080p without issue. Scaling down to 720p from 4K60 is not supported.
Color Space	4:4:4, YUV
LocalPlay/HostPlay	8 playlists
Note	Jumbo Frames Required
Video Wall Construction	Supported within the N2622S, N2625, or N2625-EK. The N2600S Series is compatible with the SVSI N3510 Windowing Processor when using H.264 stream.
Network Video Recording	Only the H264 stream is compatible so long as the source is not HDCP.

H264/H265 VIDEO	DOES NOT SUPPORT HDCP
Stream Video Input	720P or 1080P
Frame Rate	50 or 60 Hz
Profiles	Baseline (BP), main (MP), high (HiP)
Bitrate Range	500 Kbps to 50 Mbps
Rate Control	CBR, VBR
Streaming Protocols	RTP, RTSP, RTMP, RTMP/S, MPEG2-TS, HTTP Live

AUDIO	
Input Signal Types	Network audio over ethernet Dante
Output Signal Types	Embedded audio on HDMI or Analog Audio Output
HDMI Audio Formats	8ch PCM
Analog Audio Format	Stereo 2-channel
Dante Audio Format	2-Channel
Dante Audio Sample Rate	44.1 kHz, 48 kHz, 88.2 kHz, 96kHz
Audio Breakaway	Supported

KEYBOARD AND MOUSE	
Keyboard & Mouse	Connect the decoder to the keyboard and mouse, and an N2600 Series Encoder to the PC being controlled

USB 2.0	
USB	Connect the decoder to an end device, such as a USB camera, audio, or USB 2.0 device, and an N2600 Series Encoder to the PC. Supports up to 4 N2622S or N2625-WP connected to a single N2612S or N2615-WP.

LATENCY	
Latency	<2-ms Scaling adds one frame of latency (17ms at 60fps)
Switching	Near Seamless with Last Frame Hold enabled

COMMUNICATIONS	
Ethernet	10/100/1000 Mbps, auto-negotiating, auto-sensing, full/half duplex, DHCP and Static IP
HDMI	HDCP, EDID management

PORTS	
+12V 2A	One 12 Volt DC power input
PO PoE+	8-wire RJ45 port 10/100/1000 Mbps 10/100/1000Base-T auto-sensing gigabit Ethernet switch port Provides network connection, network AV video, and power to the Encoders and Decoders PoE+ power
P1	8-wire RJ45 port 10/100/1000 Mbps 10/100/1000Base-T auto-sensing gigabit Ethernet switch port Provides network connection, network AV video
IR IN (front panel)	3-pin terminal Phoenix connector. Provides Infrared (IR) input only and passes signal back to connected decoder (33-60 kHz; typically, 39 kHz) IR receiver is necessary (not included)
IR OUT	2-pin terminal Phoenix connector Provides Infrared (IR) output only (33-60 kHz; typically, 39 kHz). Emitter is necessary (not included)
RS232	3-pin terminal Phoenix connector which provides a serial control interface. Full duplex communication. Available terminal speed settings: 1200-115200 baud rate
AUDIO	5-pin terminal Phoenix connector which provides user-selectable balanced/unbalanced output Dedicated audio input
HDMI OUT	HDMI video output (passive pass-through from HDMI IN only)

CONTROLS AND INDICATORS – FRONT PANEL	
RESET Button	Recessed pushbutton Press to initiate a 'warm restart' causing the processor to reset, but not lose power. A reset does NOT affect the current settings
ID Button	Recessed pushbutton Press to send a notification out on the network to identify the unit (the notification causes a pop-up dialog in N-Able and N-Command)  Holding the button for 30 seconds and releasing will cause the device to return to factory configuration.
POWER LED	On solid (green) when operating power is supplied (via PoE or local power supply)
STATUS LED	On flashing (green) when there is software activity
STREAM LED	On (green) when the unit is streaming video

POWER SUPPLY	
Power Supply, External, Optional	2.0 Amp @ 12 Volts DC; 100-240 Volts AC power supply; optional NMX-ACC-N9312 (FGN9312)
Power over Ethernet (PoE+), External, Optional	<p>Can be powered via a PoE+ switch or other equipment with a PoE+ source. Conforms to IEEE 802.3at Class 4 (802.3at Type 2)</p> <p>NOTE: For the unit to receive Power over Ethernet (PoE+), it must be connected to a switch or other equipment that has a PoE+ PSE (Power Sourcing Equipment) port</p> <p>Warning: Do not run wiring connected to a PoE+ PSE port outside of the building where the PSE resides. It is for intra-building use only</p>

ENVIRONMENTAL	
Temperature	32° to 104°F (0° to 40°C)
Humidity	10% to 90% RH (non-condensing)
Heat Dissipation	85 BTU/hr

GENERAL	
Product Dimensions (HWD)	1 1/6" x 7 7/8" x 5" (26.6mm x 200mm x 127mm)
Product Weight	2.16 lbs. (Approx. 0.97kg)
Shipping Weight	2.67 lbs. (Approx. 1.2kg)
Regulatory Compliance	FCC, CE, KC, and UL (Including 2043)

