

## EVH G2 Horn Load 15"

---

- New EV transducers and low-loss crossover, next-gen low latency FIR presets with flat phase response
- Indoor and outdoor (FW) options available
- Consistent pattern control ensures seamless arrayed performance
- Removable Euroblock connections and built-in NL4-connection, and new mounting option for full-range models
- Updated grille design withstands high-SPLs while wet, and is fully front-serviceable

Introducing the long-anticipated second-generation of EVH loudspeaker from Electro-Voice. EV's most versatile point-source lines for short to medium-throw applications launched in 2008 is now updated to perform even better in all point-source projects.


From mid-sized stadiums, performing arts spaces, and theaters, to high-SPL music venues or houses of worship, EVH G2 has been fully redesigned with modern components and processing to elevate the quality of an installation at a better value than ever before.

While EVH G2 inherit external dimensions from its 1st-generation equivalent, every other aspect has been redesigned from scratch for better performance. Completely new in-house EV transducers, low-loss crossovers, EV's highest performance HF horns ever, flat-phase FIR presets with <10ms of system latency, new ergonomic wiring input panels, and so on.

Every detail of each model has been carefully considered to deliver not just a light refresh but a reimagining of how much performance is possible from a two-way loudspeaker at this price class.

EVH-15 G2 is a high-performance full-range loudspeaker, available in five coverage patterns: 40° x 30°, 60° x 40°, 60° x 60°, 90° x 50°, and 90° x 90°.

Available in black and white colors, as well as indoor or outdoor (fully weatherized) versions, all EVH-15 G2 models are IP55 per IEC 60529. This water and dust protection is valid with the moisture resistant cover installed and a minimum 5° down tilt. Fully weatherized models are also able to handle full exposure to the elements, including high salt marine environments.

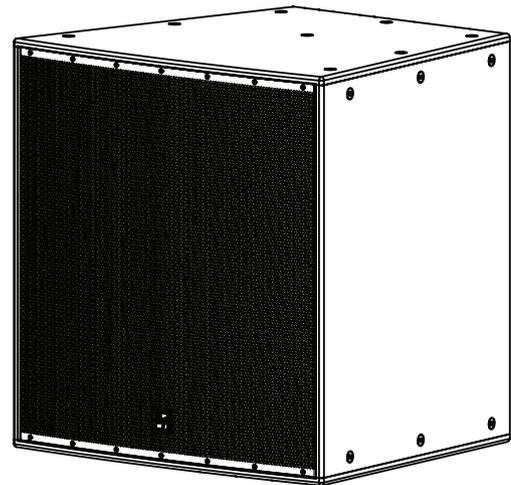

The new single-step polyurea paint provides a consistent, higher performance exterior across multiple product families. The brand new white paint offers reliable UV performance and bright RAL9003 color.

Suspension options include U-brackets, eyebolts and rigging kits. Four Omni-mount points on the rear of the enclosure also provide on-cabinet mounting option for compatible accessories.


# Technical specifications

## EVH-15/43 models


Frequency response (-3 dB) <sup>1</sup>	62 Hz - 18 kHz
Frequency range (-10 dB) <sup>1</sup>	55 Hz - 20 kHz
AES75 Linear SPL <sup>2</sup>	123 dB
AES75 Peak SPL <sup>2</sup>	141 dB
Coverage angle H x V	40° x 30°
Power handling (continuous)	400 W
Power handling (program)	800 W
Peak input voltage <sup>3</sup>	130 V
Peak input voltage (HF) <sup>4</sup>	62 V
Peak input voltage (LF) <sup>5</sup>	130 V
Nominal impedance	8 Ω
Minimum impedance	6 Ω
Preset high-pass	50 Hz
Connector type	10 AWG Euroblock NL4
Suspension points	(30) M10 rigging points
IP rating <sup>6</sup>	IP55
Operating temperature	-20°C - +50°C
Storage temperature	-40°C - +60°C
Color	Black (RAL9005) White (RAL9003)
Dimensions (H x W x D)	30.3 in x 30.3 in x 20.4 in
Dimensions (H x W x D)	769 mm x 769 mm x 681 mm
Weight	150 lb
Weight	68 kg
Shipping weight	205 lb
Shipping weight	93 kg
Included hardware	Dual gland nut cover plate "Horn-rotated" label sticker

- <sup>1</sup> Full-range preset, measured in full-space (4π)
- <sup>2</sup> Measured per AES75-2023
- <sup>3</sup> Passive
- <sup>4</sup> Bi-amp HF
- <sup>5</sup> Bi-amp LF
- <sup>6</sup> Only FW models in outdoor, wet, or salty environments


### Frequency + Phase response

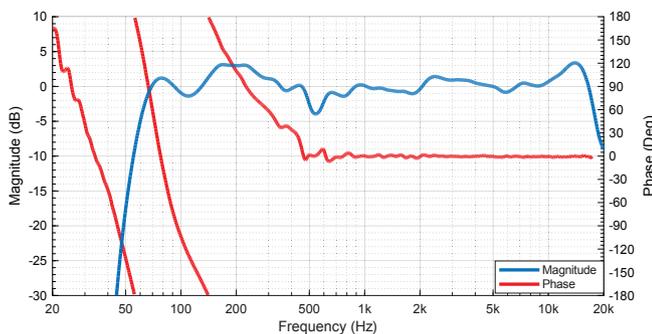


### Impedance response

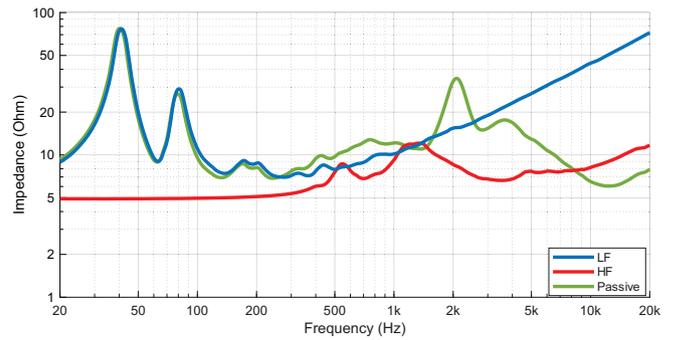


### Vertical spatial frequency response

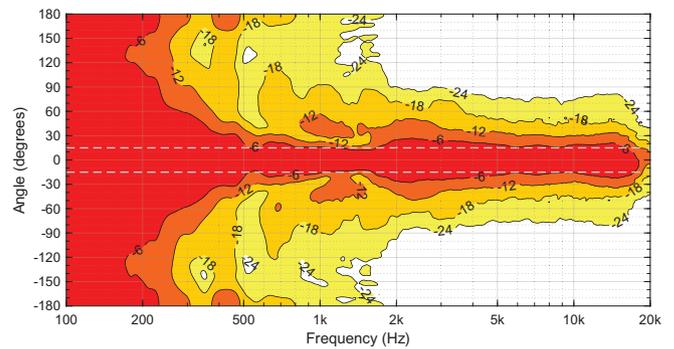

### Horizontal spatial frequency response

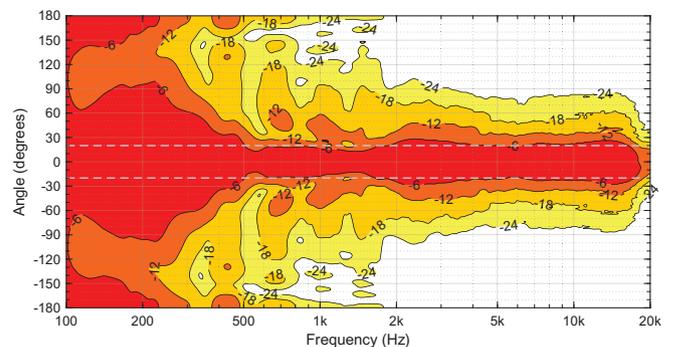

### Beamwidth

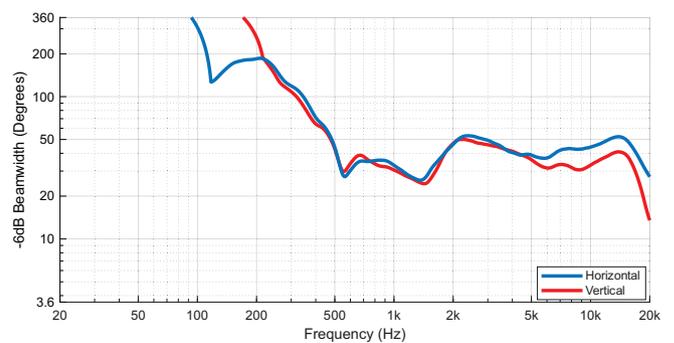


**EVH-15/64 models**


Frequency response (-3 dB) <sup>1</sup>	62 Hz - 18 kHz
Frequency range (-10 dB) <sup>1</sup>	55 Hz - 20 kHz
AES75 Linear SPL <sup>2</sup>	123 dB
AES75 Peak SPL <sup>2</sup>	141 dB
Coverage angle H x V	60° x 60°
Power handling (continuous)	400 W
Power handling (program)	800 W
Peak input voltage <sup>3</sup>	130 V
Peak input voltage (HF) <sup>4</sup>	62 V
Peak input voltage (LF) <sup>5</sup>	130 V
Nominal impedance	8 Ω
Minimum impedance	6 Ω
Preset high-pass	50 Hz
Connector type	10 AWG Euroblock NL4
Suspension points	(30) M10 rigging points
IP rating <sup>6</sup>	IP55
Operating temperature	-20°C - +50°C
Storage temperature	-40°C - +60°C
Color	Black (RAL9005) White (RAL9003)
Dimensions (H x W x D)	30.3 in x 30.3 in x 20.4 in
Dimensions (H x W x D)	769 mm x 769 mm x 681 mm
Weight	150 lb
Weight	68 kg
Shipping weight	205 lb
Shipping weight	93 kg
Included hardware	Dual gland nut cover plate "Horn-rotated" label sticker

<sup>1</sup> Full-range preset, measured in full-space (4π)  
<sup>2</sup> Measured per AES75-2023  
<sup>3</sup> Passive  
<sup>4</sup> Bi-amp HF  
<sup>5</sup> Bi-amp LF  
<sup>6</sup> Only FW models in outdoor, wet, or salty environments


**Frequency + Phase response**

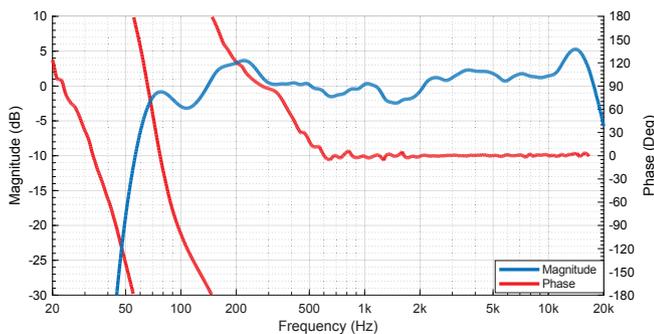


**Impedance response**

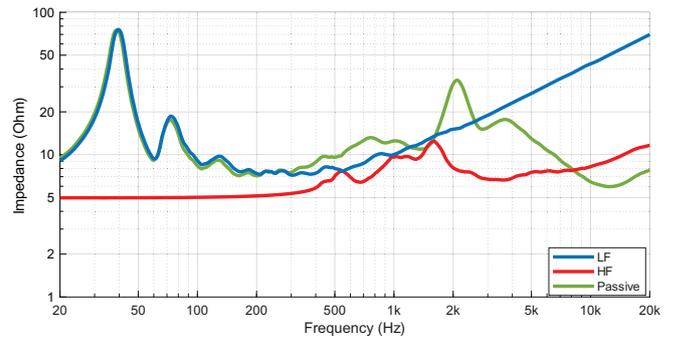


**Vertical spatial frequency response**

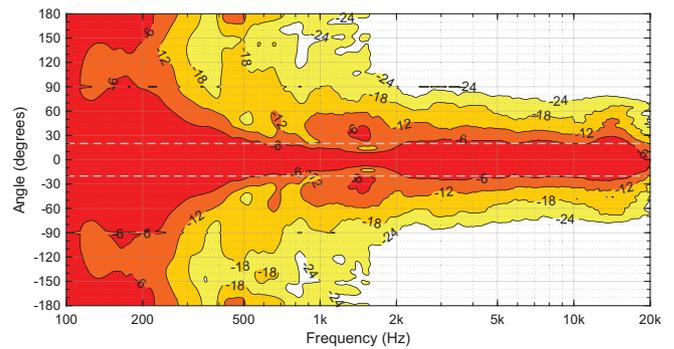

**Horizontal spatial frequency response**

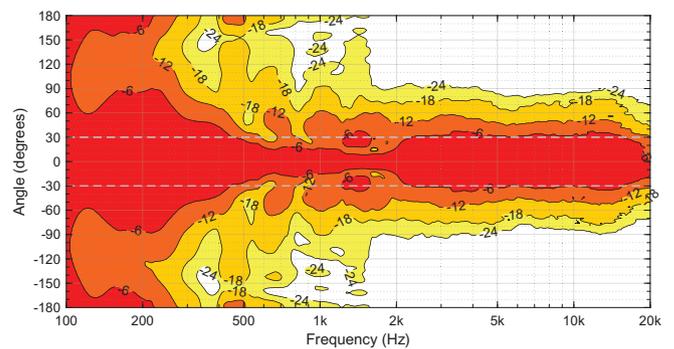

**Beamwidth**

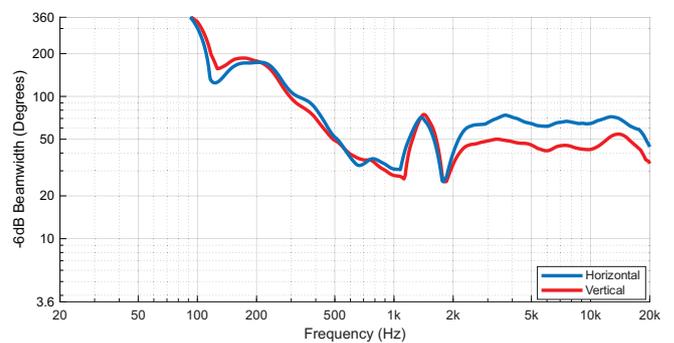


**EVH-15/66 models**


Frequency response (-3 dB) <sup>1</sup>	62 Hz - 18 kHz
Frequency range (-10 dB) <sup>1</sup>	55 Hz - 20 kHz
AES75 Linear SPL <sup>2</sup>	122 dB
AES75 Peak SPL <sup>2</sup>	140 dB
Coverage angle H x V	60° x 60°
Power handling (continuous) <sup>2</sup>	400 W
Power handling (program) <sup>2</sup>	800 W
Peak input voltage <sup>2</sup>	130 V
Peak input voltage (HF) <sup>3</sup>	62 V
Peak input voltage (LF) <sup>4</sup>	130 V
Nominal impedance	8 Ω
Minimum impedance	6 Ω
Preset high-pass <sup>2</sup>	50 Hz
Connector type	10 AWG Euroblock NL4
Suspension points	(30) M10 rigging points
IP rating <sup>5</sup>	IP55
Operating temperature	-20°C - +50°C
Storage temperature	-40°C - +60°C
Color	Black (RAL9005) White (RAL9003)
Dimensions (H x W x D)	30.3 in x 30.3 in x 20.4 in
Dimensions (H x W x D)	769 mm x 769 mm x 681 mm
Weight	162 lb
Weight	73.5 kg
Shipping weight	217 lb
Shipping weight	98.5 kg
Included hardware	Dual gland nut cover plate "Horn-rotated" label sticker

- <sup>1</sup> Full-range preset, measured in full-space (4π)
- <sup>2</sup> Measured per AES75-2023
- <sup>3</sup> Passive
- <sup>4</sup> Bi-amp HF
- <sup>5</sup> Bi-amp LF
- <sup>6</sup> Only FW models in outdoor, wet, or salty environments


**Frequency + Phase response**

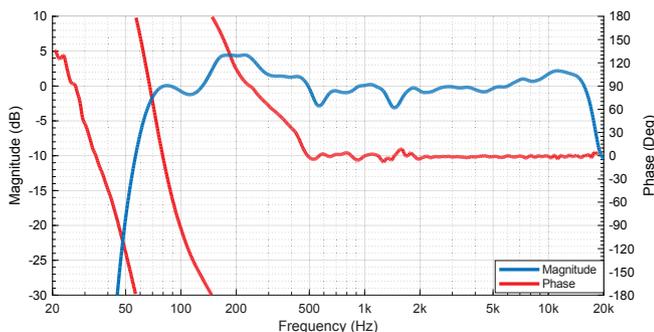


**Impedance response**

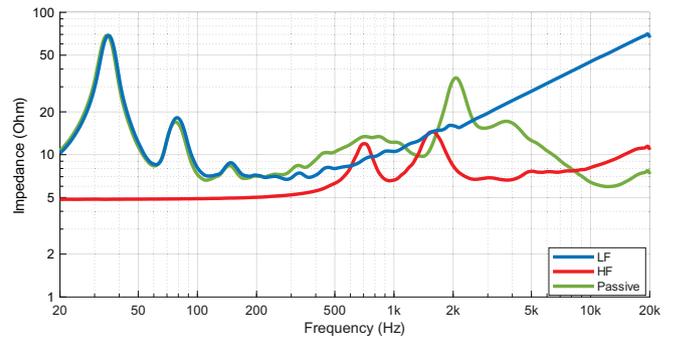


**Vertical spatial frequency response**

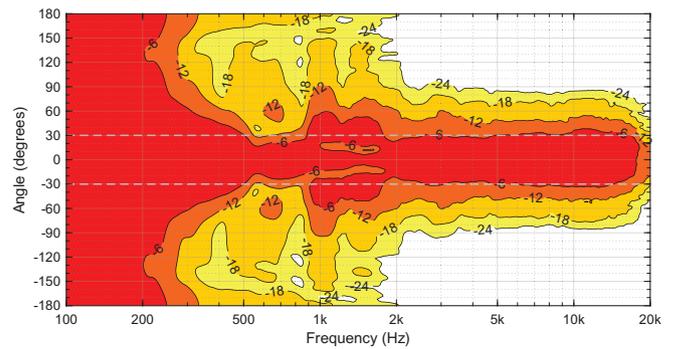

**Horizontal spatial frequency response**

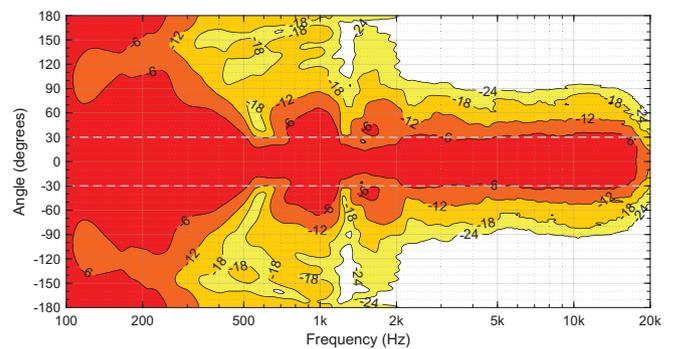

**Beamwidth**

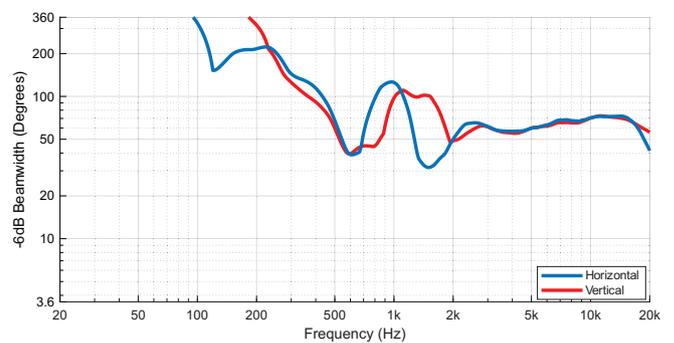


**EVH-15/95 models**


Frequency response (-3 dB) <sup>1</sup>	62 Hz - 18 kHz
Frequency range (-10 dB) <sup>1</sup>	55 Hz - 20 kHz
AES75 Linear SPL <sup>2</sup>	121 dB
AES75 Peak SPL <sup>2</sup>	139 dB
Coverage angle H x V	90° x 50°
Power handling (continuous)	400 W
Power handling (program)	800 W
Peak input voltage <sup>3</sup>	130 V
Peak input voltage (HF) <sup>4</sup>	62 V
Peak input voltage (LF) <sup>5</sup>	130 V
Nominal impedance	8 Ω
Minimum impedance	6 Ω
Preset high-pass	50 Hz
Connector type	10 AWG Euroblock NL4
Suspension points	(30) M10 rigging points
IP rating <sup>6</sup>	IP55
Operating temperature	-20°C - +50°C
Storage temperature	-40°C - +60°C
Color	Black (RAL9005) White (RAL9003)
Dimensions (H x W x D)	30.3 in x 30.3 in x 20.4 in
Dimensions (H x W x D)	769 mm x 769 mm x 681 mm
Weight	162 lb
Weight	73.5 kg
Shipping weight	217 lb
Shipping weight	98.5 kg
Included hardware	Dual gland nut cover plate "Horn-rotated" label sticker

- <sup>1</sup> Full-range preset, measured in full-space (4π)
- <sup>2</sup> Measured per AES75-2023
- <sup>3</sup> Passive
- <sup>4</sup> Bi-amp HF
- <sup>5</sup> Bi-amp LF
- <sup>6</sup> Only FW models in outdoor, wet, or salty environments


**Frequency + Phase response**

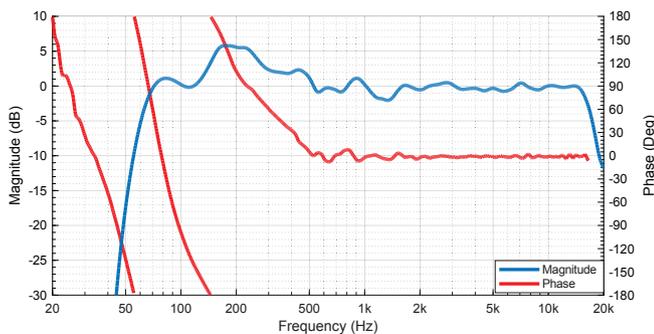


**Impedance response**

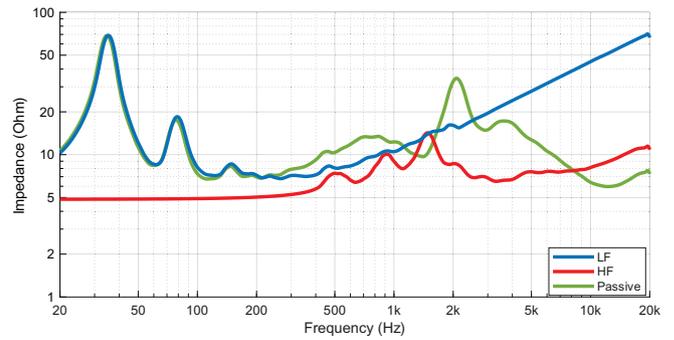


**Vertical spatial frequency response**

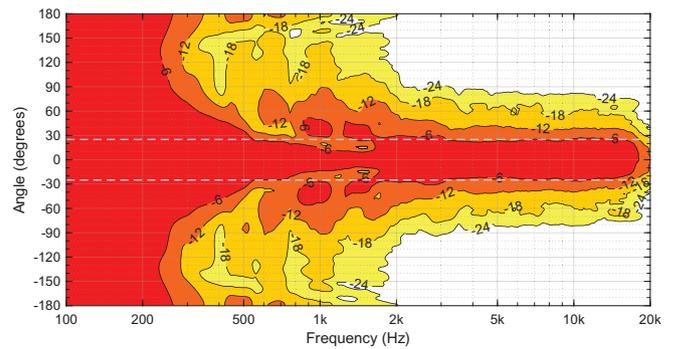

**Horizontal spatial frequency response**

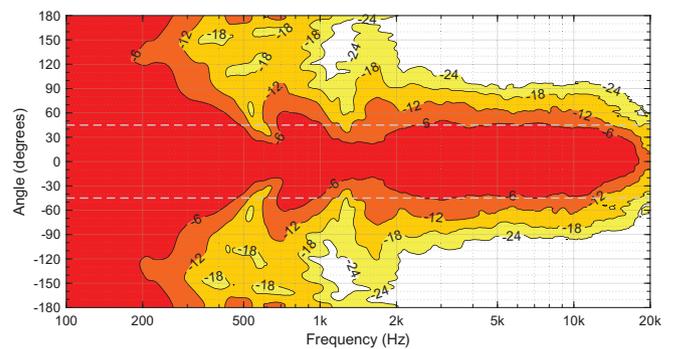

**Beamwidth**

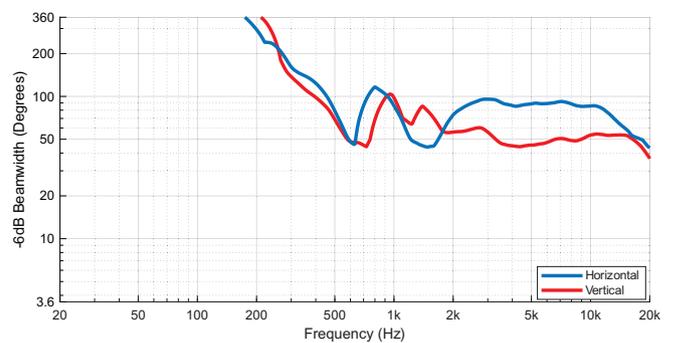


**EVH-15/99 models**


Frequency response (-3 dB) <sup>1</sup>	62 Hz - 18 kHz
Frequency range (-10 dB) <sup>1</sup>	55 Hz - 20 kHz
AES75 Linear SPL <sup>2</sup>	121 dB
AES75 Peak SPL <sup>2</sup>	139 dB
Coverage angle H x V	90° x 90°
Power handling (continuous)	400 W
Power handling (program)	800 W
Peak input voltage <sup>3</sup>	130 V
Peak input voltage (HF) <sup>4</sup>	62 V
Peak input voltage (LF) <sup>5</sup>	130 V
Nominal impedance	8 Ω
Minimum impedance	6 Ω
Preset high-pass	50 Hz
Connector type	10 AWG Euroblock NL4
Suspension points	(30) M10 rigging points
IP rating <sup>6</sup>	IP55
Operating temperature	-20°C - +50°C
Storage temperature	-40°C - +60°C
Color	Black (RAL9005) White (RAL9003)
Dimensions (H x W x D)	30.3 in x 30.3 in x 20.4 in
Dimensions (H x W x D)	769 mm x 769 mm x 681 mm
Weight	162 lb
Weight	73.5 kg
Shipping weight	217 lb
Shipping weight	98.5 kg
Included hardware	Dual gland nut cover plate "Horn-rotated" label sticker

- <sup>1</sup> Full-range preset, measured in full-space (4π)
- <sup>2</sup> Measured per AES75-2023
- <sup>3</sup> Passive
- <sup>4</sup> Bi-amp HF
- <sup>5</sup> Bi-amp LF
- <sup>6</sup> Only FW models in outdoor, wet, or salty environments


**Frequency + Phase response**

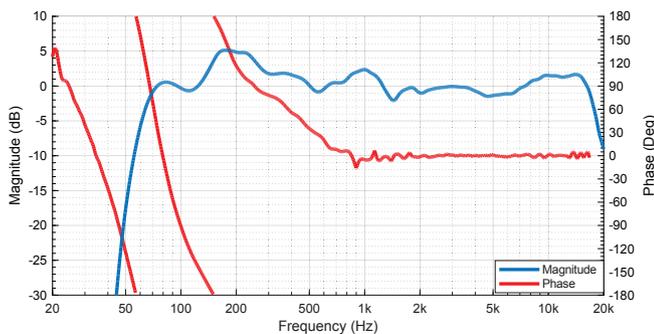


**Impedance response**

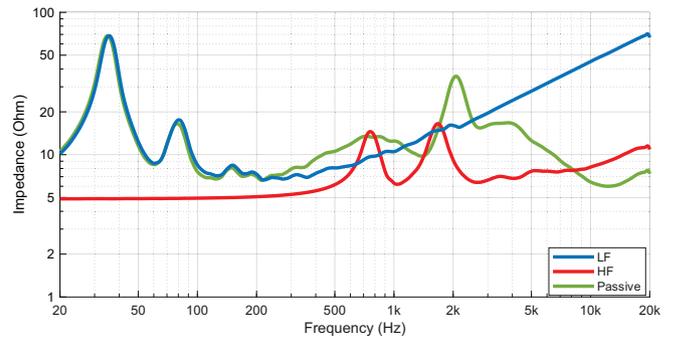


**Vertical spatial frequency response**

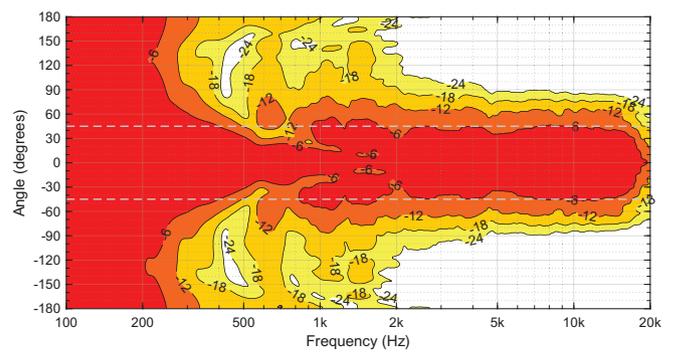

**Horizontal spatial frequency response**

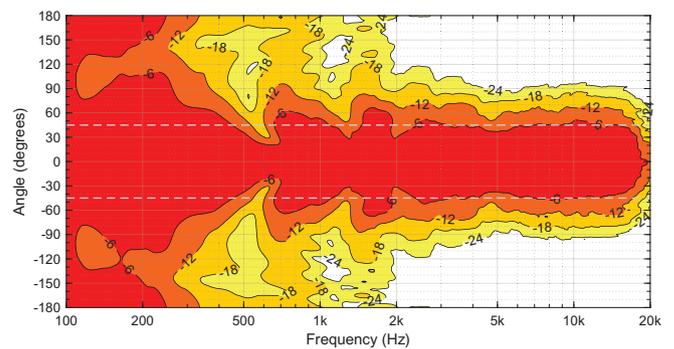

**Beamwidth**

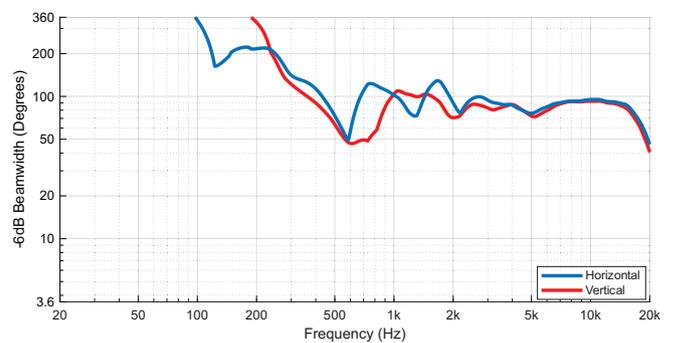

**Amplifier configurations**

Amplifier / Total no. of speakers	IX15:4	IX30:4 IX30:8	IX60:4 IX60:8	IPX5:4	IPX10:4 IPX10:8
2	-1.5 dB	0 dB	0 dB	0 dB	0 dB
4	-4.5 dB	-1.5 dB			
8	-	-4.5 dB	-1.5 dB		
16	-	-	-4.5 dB	-2 dB	

Tab. 1: SPL relative to max SPL


**Compatible system solutions, electronics**

- Dynacord IX15:4 4-channel DSP power amplifier, 1.5KW
- Dynacord IX30:4 4-channel DSP power amplifier, 3KW
- Dynacord IX30:8 8-channel DSP power amplifier, 6KW
- Dynacord IX60:4 4-channel DSP power amplifier, 6KW
- Dynacord IX60:8 8-channel DSP power amplifier, 6KW
- Dynacord IPX10:8 DSP power amplifier 8x1250W, install
- Dynacord IPX5:4 DSP power amplifier 4x1250W, install

**Compatible system solutions, software**

- Dynacord SONICUE control software
- Dynacord V Series Zone Audio Platform
- Q-Sys
- PowerSoft (Unica, Unica-T)

**Dimensions**

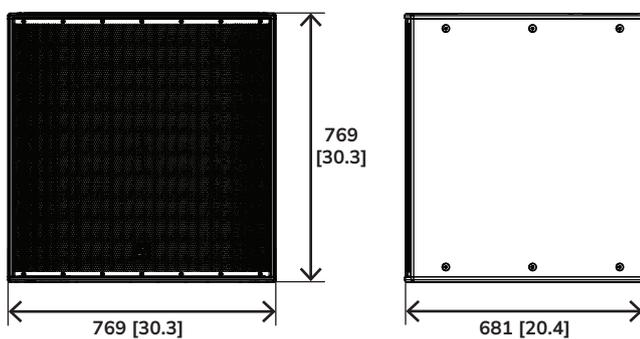

mm [inch]

**Ordering information**

- EVH-15/43-B G2 Horn load 15" 40x30 indoor bl  
Order number EVH-15/43-B | F.01U.417.964
- EVH-15/43-BFW G2 Horn load 15" 40x30 outdoor bl  
Order number EVH-15/43-BFW | F.01U.417.966
- EVH-15/43-W G2 Horn load 15" 40x30 indoor wh  
Order number EVH-15/43-W | F.01U.417.965
- EVH-15/43-WFW G2 Horn load 15" 40x30 outdoor wh  
Order number EVH-15/43-WFW | F.01U.417.967
- EVH-15/64-B G2 Horn load 15" 60x40 indoor bl  
Order number EVH-15/64-B | F.01U.417.968
- EVH-15/64-BFW G2 Horn load 15" 60x40 outdoor bl  
Order number EVH-15/64-BFW | F.01U.417.970
- EVH-15/64-W G2 Horn load 15" 60x40 indoor wh  
Order number EVH-15/64-W | F.01U.417.969
- EVH-15/64-WFW G2 Horn load 15" 60x40 outdoor wh  
Order number EVH-15/64-WFW | F.01U.417.971
- EVH-15/66-B G2 Horn load 15" 60x60 indoor bl  
Order number EVH-15/66-B | F.01U.417.972
- EVH-15/66-BFW G2 Horn load 15" 60x60 outdoor bl  
Order number EVH-15/66-BFW | F.01U.417.974
- EVH-15/66-W G2 Horn load 15" 60x60 indoor wh  
Order number EVH-15/66-W | F.01U.417.973
- EVH-15/66-WFW G2 Horn load 15" 60x60 outdoor wh  
Order number EVH-15/66-WFW | F.01U.417.975
- EVH-15/95-B G2 Horn load 15" 90x50 indoor bl  
Order number EVH-15/95-B | F.01U.417.976
- EVH-15/95-BFW G2 Horn load 15" 90x50 outdoor bl  
Order number EVH-15/95-BFW | F.01U.417.978
- EVH-15/95-W G2 Horn load 15" 90x50 indoor wh  
Order number EVH-15/95-W | F.01U.417.977
- EVH-15/95-WFW G2 Horn load 15" 90x50 outdoor wh  
Order number EVH-15/95-WFW | F.01U.417.979
- EVH-15/99-B G2 Horn load 15" 90x90 indoor bl  
Order number EVH-15/99-B | F.01U.417.980
- EVH-15/99-BFW G2 Horn load 15" 90x90 outdoor bl  
Order number EVH-15/99-BFW | F.01U.417.982
- EVH-15/99-W G2 Horn load 15" 90x90 indoor wh  
Order number EVH-15/99-W | F.01U.417.981
- EVH-15/99-WFW G2 Horn load 15" 90x90 outdoor wh  
Order number EVH-15/99-WFW | F.01U.417.983
- Accessories**
- EBK-M10L-4HS Eyebolt high-strength 45mm 4 Pack  
Shoulder eyebolts with fender washers  
Order number EBK-M10L-4HS | F.01U.401.125
- EVF-UB-BLK-LB U-bracket for all EVF speakers black  
Mounting bracket for EVF, black  
Order number EVF-UB-BLK-LB | F.01U.283.510

**EVF-UB-WHT-LB U-bracket for all EVF speakers white**

Mounting bracket for EVF, white

Order number **EVF-UB-WHT-LB | F.01U.283.511****EVC-WB-BLK Wall bracket EVC 8",12",15" black**

OmniMount style pan/tilt loudspeaker mount, black

Order number **EVC-WB-BLK | F.01U.330.653****EVC-WB-WHT Wall bracket EVC 8",12",15" white**

OmniMount style pan/tilt loudspeaker mount, white

Order number **EVC-WB-WHT | F.01U.330.654****HRK-1B-LB Horizontal rigging kit black, EVF + EVF**

Horizontal rigging kit for EVF, black

Order number **HRK-1B-LB | F.01U.283.502****HRK-1W-LB Horizontal rigging kit white, EVF + EVF**

Horizontal rigging kit for EVF, white

Order number **HRK-1W-LB | F.01U.283.503****HRK-2B-LB Horizontal rigging kit black, EVF + EVH**Horizontal rigging kit for EVF & EVH full-range to EVF sub,  
blackOrder number **HRK-2B-LB | F.01U.283.504****HRK-2W-LB Horizontal rigging kit white, EVF + EVH**Horizontal rigging kit for EVF & EVH full-range to EVF sub,  
whiteOrder number **HRK-2W-LB | F.01U.283.505****HRK-3B-LB Horizontal rig kit black, EVH + EVH**

Horizontal rigging kit for EVH, black

Order number **HRK-3B-LB | F.01U.283.498****HRK-3W-LB Horizontal rig kit white, EVH + EVH**

Horizontal rigging kit for EVH, white

Order number **HRK-3W-LB | F.01U.283.499****VRK-1B-LB Vertical rigging kit black, EVF + EVF**

Vertical rigging kit for EVF, black

Order number **VRK-1B-LB | F.01U.283.506****VRK-1W-LB Vertical rigging kit white, EVF + EVF**

Vertical rigging kit for EVF, white

Order number **VRK-1W-LB | F.01U.283.507****VRK-2B-LB Vertical rigging kit black, EVF + EVH**

Vertical rigging kit for EVF &amp; EVH full-range to EVF subs, black

Order number **VRK-2B-LB | F.01U.283.508****VRK-2W-LB Vertical rigging kit white, EVF + EVH**

Vertical rigging kit for EVF &amp; EVH full-range to EVF subs, white

Order number **VRK-2W-LB | F.01U.283.509****VRK-3B-LB Vertical rig kit black, EVH + EVH**

Vertical rigging kit for EVH, black

Order number **VRK-3B-LB | F.01U.283.500****VRK-3W-LB Vertical rig kit white, EVH + EVH**

Vertical rigging kit for EVH, white

Order number **VRK-3W-LB | F.01U.283.501**