



IC HOME

Guardi 2

Smart Monitoring Mini Camera

Part of the IC Home lineup, the Guardi 2 features crisp 5MP video, AI-powered Human and Pet Detection, and two-way talk with a built-in mic and speaker. With flexible magnetic mounting, IR night vision, and fast WiFi 6 support, it's easy to place anywhere you need peace of mind. Set up in minutes and monitor from anywhere using the IC View Pro mobile app.



Wi-Fi 6 Support




Privacy Mode



2-Way Talk



Magnetic Base



Human Detection




Pet Detection



Abnormal Sound Detection



H.265

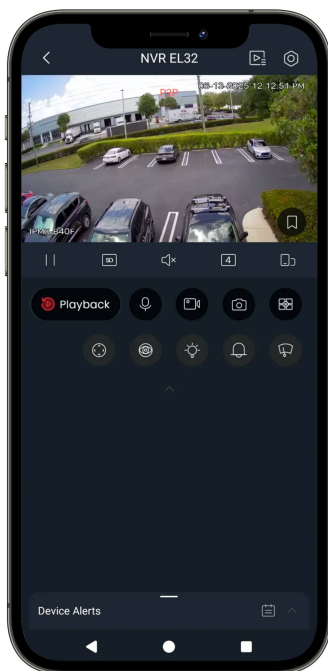

Stay Connected To What Matters.


The Singer 2 integrates seamlessly with IC Realtime's IC View Pro app, enabling unified access to both IC Home and IC Realtime core surveillance products within a single platform.

With a new, intuitive UI design, easily access Live View, Playback, control PTZ cameras and easily share devices- all from one app.

Powered by:



Guardi 2

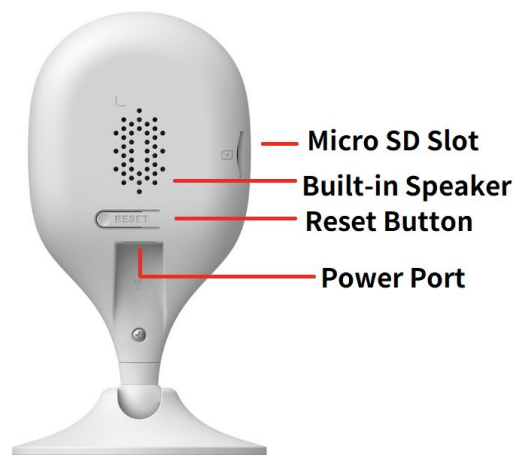

Technical Specifications

Camera

Image Sensor	1/2.7-in. CMOS
Max. Aperture	F2.0
Effective Pixels	5MP (2880 × 1620)
IR Distance	32 ft (10m)
Illuminator/ Control	1 LED, Auto
Field of View	H: 90°, V: 49°, D: 106°

Video & Audio

Resolution	5MP (2880 × 1620); nHD (640 × 360)
Video Compression	H.265 (80 kbps–4096 kbps)
Audio Compression	G.711a
Frame Rate	Main Stream: 2880 × 1620@ (1-25/30 fps) Sub Stream: 640 × 360@(1-25/30 fps)
Image Rotation	0°/180°
2 Way Talk	Built-in Mic & Speakers
Day/Night	Auto(ICR)/Color/B/W

Wi-Fi

IEEE 802.11b/g/n/ax 2.412-2.472 GHz, 2.4G

Events and Notifications

Supported Events	Human Detection Pet Detection
Notifications	IC View Pro App (iOS, Android)

Storage

Micro SD Slot	Supports up to 256GB Micro SD Card
Compatibility	IC Realtime NVR's and HDVR's

General

Mount	Surface; Magnetic base included
Pan/Tilt/Rotation Range	Pan: 0° to 360°; Tilt: -10° to 70°
Power Supply	5 VDC, 1 A (Included)
Power Consumption	1.65 W; 2.3 W, Maximum: 2.75 W
Operating Conditions	14 °F to +113 °F (-10 °C to +45 °C) Less than 95% RH
Ingress Protection	N/A; Indoor Use
Dimensions (L x W x H)	Ø2.68" × 1.26" × 4.69" (Ø68.0 mm x 31.9 mm x 119.2 mm)
Weight	0.21 lb (95g)
Certifications	CE, FCC

What's Included:

