

### Key Features:

- ▶ Compact enclosure
- ▶ 258 mm (10 in) LF transducer
- ▶ 90° x 50° Progressive Transition™ Field Rotatable Waveguide with a 25 mm (1 in) exit 35mm (1.5") voice-coil compression driver
- ▶ Dual Neutrik NL4 connectors plus screw terminals
- ▶ Multiple attachment points for ultimate flexibility

### Applications:

- ▶ Performing Spaces
- ▶ Clubs & Bars
- ▶ Houses of Worship
- ▶ Multi Media Spaces
- ▶ Retail & Hospitality Spaces
- ▶ Presentation Suites
- ▶ Educational Facilities

AC195 is a compact 2-way full-range loudspeaker system comprised of one 258 mm (10 in) low frequency driver and one 25 mm (1 in) exit/35 mm (1.5 in) voice-coil compression driver. The rotatable PT™ Progressive Transition waveguide provides 90° by 50° coverage in vertical cabinet orientation. High-slope passive crossovers minimize band overlap and well-controlled offaxis response.

The cabinet is fitted with M10 threaded suspension points. Four threaded inserts located on back of the enclosure allow attachment of a MultiMount® or similar type mounting.

AC195 is part of JBL's AE Application Engineered Series, a versatile family of loudspeakers for a wide variety of fixed installation applications.



### Specifications:

<b>System:</b>	
Frequency Range (-10 dB) <sup>1</sup> :	68 Hz - 20 kHz
Frequency Response (±3 dB) <sup>1</sup> :	85 Hz - 18kHz
System Sensitivity (1w @ 1m) <sup>1</sup> :	95 dB
Nominal Impedance:	8 ohms
Maximum SPL(1m) <sup>2</sup> :	118 dB (124 dB peak)
300W (1200W peak), 2 hrs <sup>3</sup> :	200 W/400 W/800 W (Continuous/Program/Peak)
2 hr Power Rating <sup>4</sup> :	300W (1200W peak), 2 hrs
System Power Rating (AES):	
Coverage Pattern:	90° x 50° (H x V)
Crossover:	1.8 kHz
<b>Transducers:</b>	
Low frequency driver:	1 x 10" woofer (P/N: 5050692), 258 mm (10 in) driver with 66 mm (2.5 in) voice-coil
High frequency driver:	1 x 2408H-2 driver with 25 mm (1 in) exit/35 mm (1.5 in) voice-coil
<b>Physical:</b>	
Input Connector:	Dual Neutrik NL4MP connectors plus covered barrier trip terminals
Enclosure:	15 mm multi-ply hardwood plywood
Grille:	Powder coated, 1.5mm perforated steel, with acoustically transparent black foam backing
Finish:	Textured black paint finish. White (-WH) available upon request. Not available with WRC & WRX finish.
Suspension / Mounting:	14 x M10 and 4 x M10 for Wall Mount Bracket. Optional U-bracket, overhead suspension bracket, and wall-mount bracket
Dimensions (H x W x D):	535 mm x 310 mm x 329 mm 21.0 in x 12.2 in x 12.9 in
Net Weight:	13.1 kg (28.8 lbs)

JBL continually engages in research related to product improvement. Some materials, production methods and design refinements are introduced into existing products without notice as a routine expression of that philosophy. For this reason, any current JBL product may differ in some respect from its published description, but will always equal or exceed the original design specifications unless otherwise stated.

1 Full space (4π) conditions


2 Calculated maximum SPL based on rated power handling

3 IEC shaped pink noise with 6dB CF for 100hrs


4 AES standard, one decade pink noise with 6 dB crest factor within device's operational band, free air. Standard AES 2 hr rating plus long-term 100 hr rating are specified for low-frequency transducers.

# ▶ AC195 2-Way Loudspeaker with 1 x 10" LF


Beamwidth

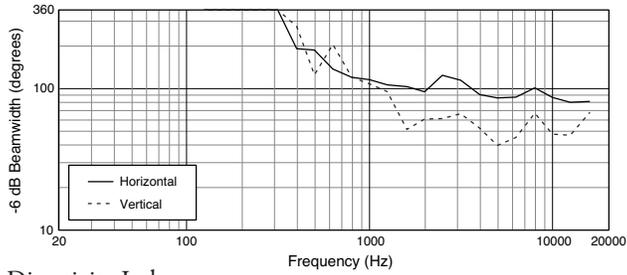


Horizontal Left Off-Axis Frequency Response

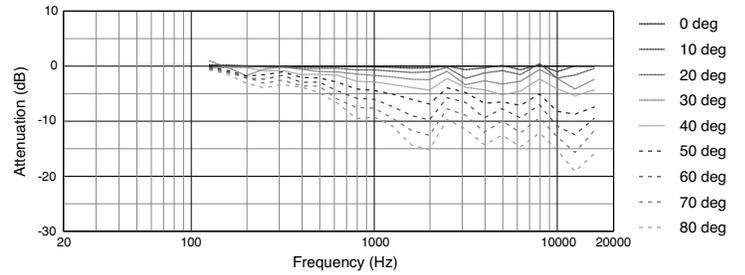


Directivity Index

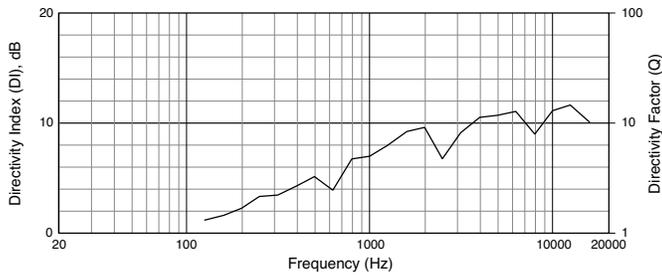


Horizontal Right Off-Axis Frequency Response

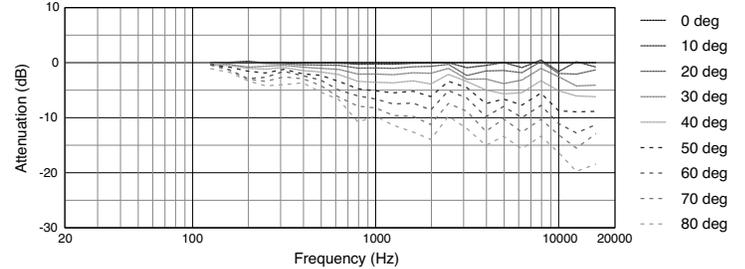


Impedance

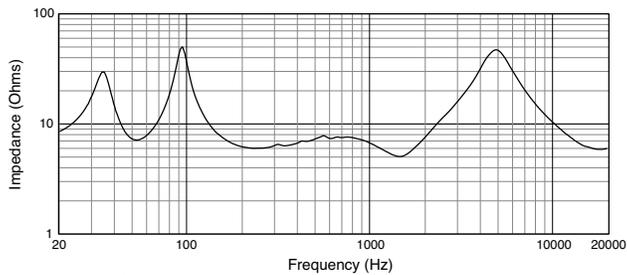


Vertical Up Off-Axis Frequency Response

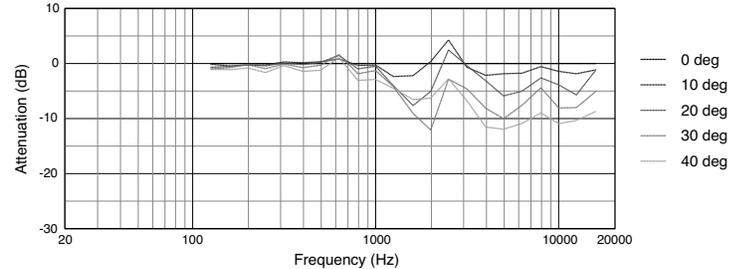

Frequency Response, 1W/1M

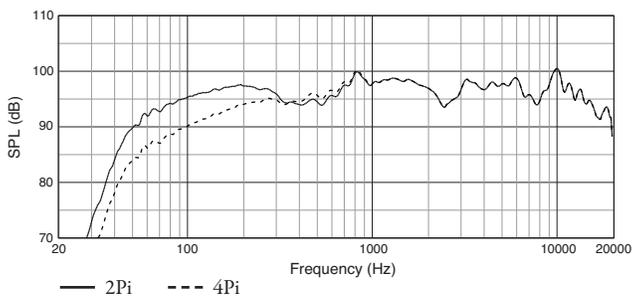


Vertical Down Off-Axis Frequency Response

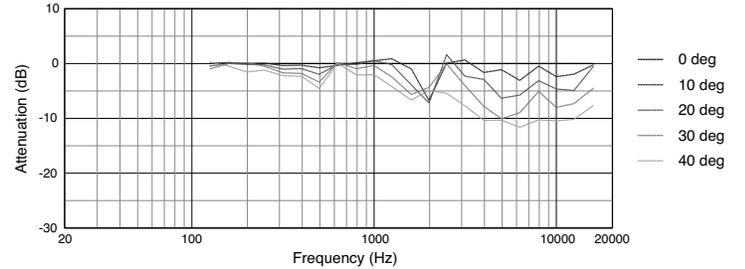

## Dimensions:

Dimensions in mm (inch)

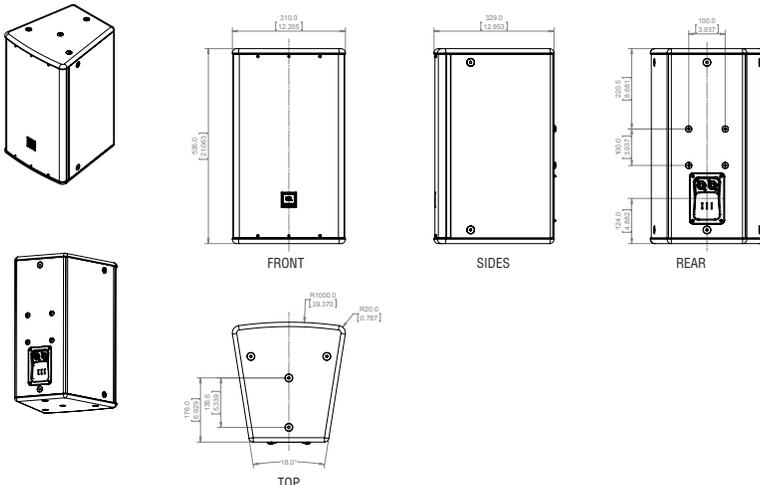

JBL Professional  
8500 Balboa Boulevard, P.O. Box 2200  
Northridge, California 91329 U.S.A.  
© Copyright 2015 JBL Professional  
www.jblpro.com

AC195  
SZ  
07/15