
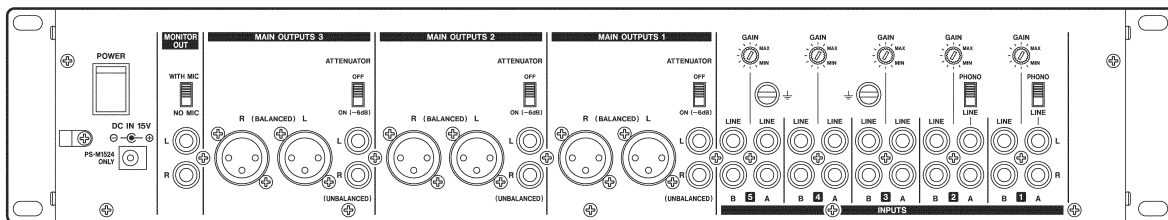


Product Spec Sheet
Mixer
MZ-223

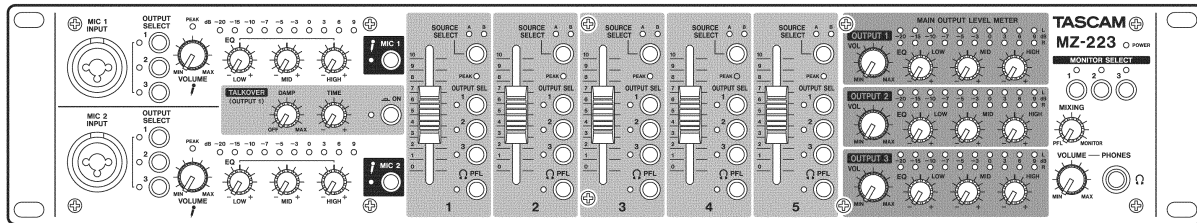

■ **Specifications**

Audio inputs

• **MIC 1-2 INPUT (BALANCED) jacks**

- Connectors: XLR-3-31 (1: GND, 2: HOT, 3: COLD)
6.3 mm (1/4") standard TRS jacks (Tip: HOT, Ring: COLD, Sleeve: GND)
- Input impedance: 33 kΩ
- Nominal input level: -65 dBu (**VOLUME** knob at **MAX**)
- Nominal input level: -30 dBu (**VOLUME** knob at **MIN**)

• **INPUTS: LINE (UNBALANCED) jacks**

- Connectors: RCA pin jacks
- Nominal input level: -10 dBV
- Maximum input level: 10 dBV
- Input impedance: 22 kΩ

Audio outputs

• **MAIN OUTPUTS (UNBALANCED) jacks**

- Connectors: RCA pin jacks
- Rated output level: -10 dBV
- Maximum output level: 6 dBV
- Output impedance: 200 Ω

• **MAIN OUTPUTS (BALANCED) jacks**

- Connectors: XLR-3-32 (1: GND, 2: HOT, 3: COLD)
- Rated output level: 4 dBu
- Maximum output level: 24 dBu
- Output impedance: 200 Ω

• **MONITOR OUT jacks**

- Connectors: RCA pin jacks
- Rated output level: -16 dBV

- Maximum output level: 0 dBV
- Output impedance: 200 Ω
- **PHONES jack**
 - Connectors: 6.3 mm (1/4") standard stereo jack
 - Maximum output: 50 mW + 50 mW (into 32 Ω load)


Audio performance

- **Frequency response**
20 Hz–20 kHz
- **Distortion**
0.03% or less
- **Crosstalk**
65 dB

General

- **Power**
 - Dedicated AC adapter (PS-M1524)
 - Input voltage: AC 100–240 V~, 50/60 Hz
 - Output voltage: DC 15 V_{DC}
 - Output current: 2.4 A
- **Power consumption**
35 W
- **Dimensions**
482.0 × 88.0 × 93.2 mm (width × height × depth, including protrusions)
- **Weight**
2.5 kg

■ Dimensional drawings

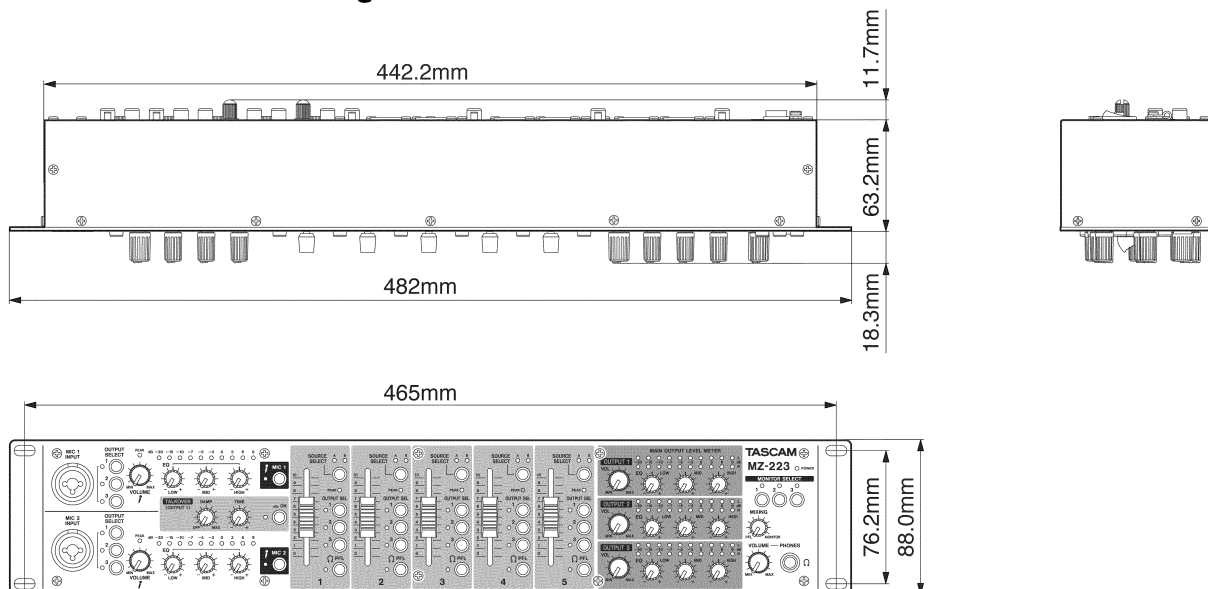

※TASCAM is trademark of TEAC CORPORATION, registered in the U.S. and other countries.
 ※Other company names, product names and logos are the trademarks or registered trademarks of their owners.
 ※Specifications and appearance are subject to change without notice.
 ※All information included in this document is as of Feb, 2018.