

Thank you for purchasing the OS80 Pole Mount Kit. The kit should include the following:

- 2 x Pole Mount Stainless Steel Banding
- 2 x BCLAMP Banding Tensioner
- 1 x PM-G-6+ Mounting Arm
- 1 x 1/2" by 3" Long Bolt
- 2 x 1/2" Washer
- 1 x 1/2" Lock Washer


PMK2 (Additional items)

- 1 x CB-G-48 Extension Arm
- 2 x 1/2" by 3" Long Bolt
- 1 x 1/2" by 5.5" Long Bolt


Below is are illustrations of how the bracket attaches to the u-bracket and light pole. The purpose of the kit is to add an adjustable mounting bracket to your loudspeaker and connect it to a standard light pole.

- Slide the steel banding through the slots on the mounting arm, and around the pole.
- Attach the bclamps to the ends of the banding, fold the slack under the clamps (figure 1), and connect the two ends with the 6" bolt and tighten.
- To attach the speaker to the bracket place a bolt with washer through the top of the mounting arm.
- Lift the OS80 and slide the bolt through the ubracket on the speaker.
- Pull the backstrap on the OS80 into place and over the bolt.
- Place a washer, lock washer, and nut on the bolt and tighten.

PMK2 Extension Arm



(figure 1)

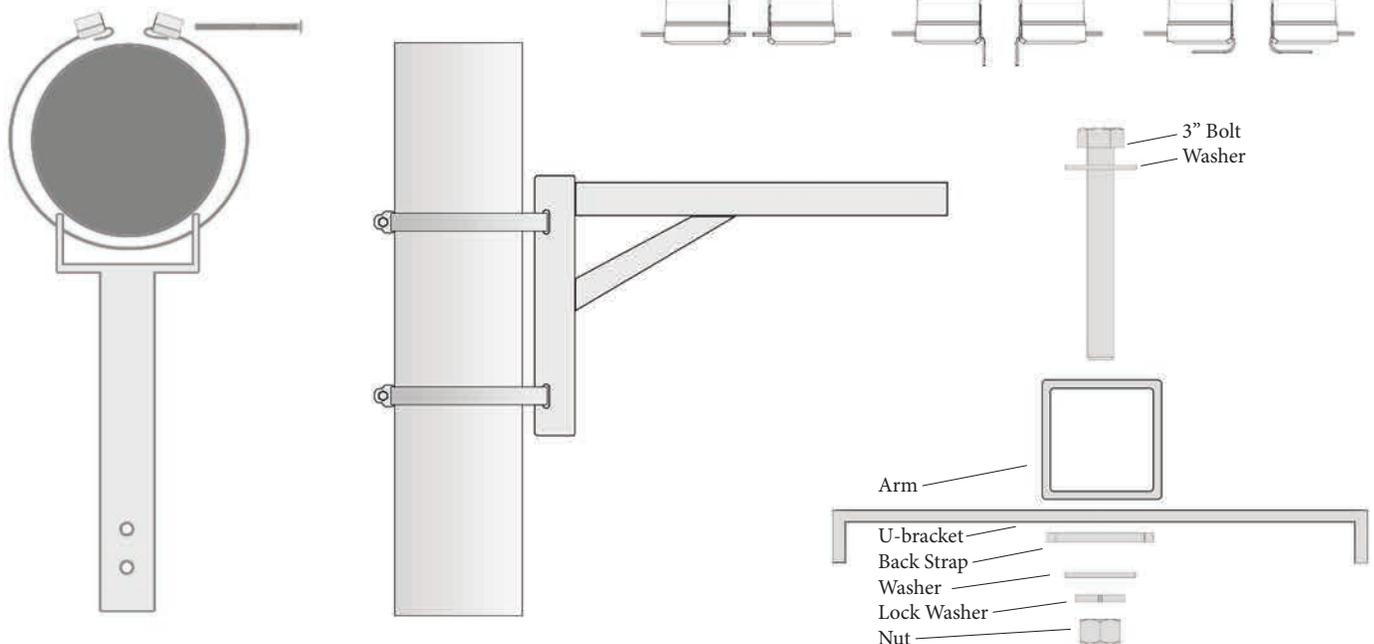

The PMK with subwoofer platform is illustrated below. The platform is created by adding two additional square bars to the top of the PMK kit using two 1/2" x 4 1/2" bolts. Four rigging point machine screws will need to be removed from the base of the THMINI15 to receive the four 3/8" fasteners through the square tubing. Washers and split washers are provided to insure the fasteners remain tight. We recommend lock tight for all fasteners. A third location for the pole strap is included to account for the additional weight of the subwoofer.

