LEDFS Models


SEAMLESS CONNECT

Universal dvLED Floor Stand

The SEAMLESS Connect Universal Series by Peerless-AV® offers a versatile lineup of substructures for environments where wall mounting is not an option. Purpose-built for dvLED video walls and all-in-one displays, the SEAMLESS Connect Universal Floor Stand supports full system weight with strength and stability. Its slim, space-saving design simplifies setup and speeds up installation. Height-adjustable feet ensure the substructure remains plumb, even on uneven surfaces, making it easy to reposition the display as needed - Ideal for corporate lobbies, retail, hospitality, showrooms, events, and entertainment spaces.

- Adaptable solution for installations where mounting direct to a wall is not an option
- Slim, space saving design fits neatly in any installation environment
- Lightweight aluminum frame makes shipping, handling and installation easier
- Anodized aluminum finish for a durable, decorative appearance
- Modular design provides scalability in installation configuration and size
- Integrated cable management protects, contains and conceals cables for a clean, professional installation
- Compatible with all SEAMLESS Connect Universal mounts, offering peace of mind when designing solutions or if project specs change
- Optional trim kit accessory (LEDTK) offers compatibility with most displays

Contact a Peerless-AV® Sales Representative for the current list of compatible latching dvLED display models.

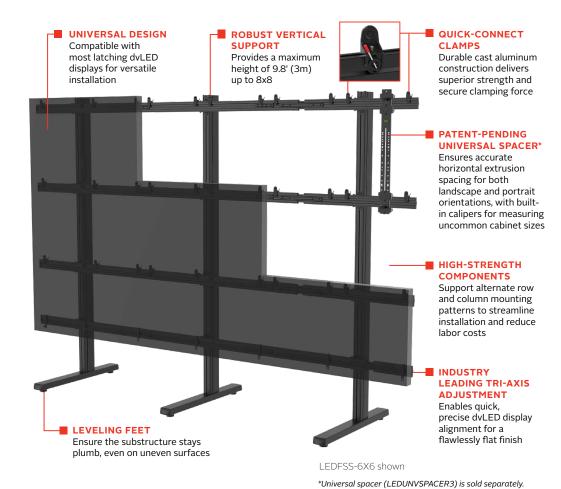





Cart/Trolley LEDMTS-6X6 shown



Bolt-Down Pedestal I FDBDS-6X6 shown



Floor-to-Wall Mount I EDFWS-6x6 shown



Floor-to-Ceiling Mount LEDECS-6X6 shown

Please visit peerless-av.com/en-us/patents for patent information.





Model Numbers WARRANTY: 5 Years

LEDFS Models SEAMLESS Connect Universal dvLED Floor Stand

LEDFSS – for dvLED displays up to 610mm wide LEDFSM – for dvLED displays up to 1220mm wide LEDFSL – for dvLED displays up to 1220mm wide

Product Specifications


UNIVERSAL SPACER*	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
LEDUNVSPACER3	55.55" x 3.94" x 2.50" (1411 x 100 x 64mm)	4lb (1.8kg)	NA	Powder Coat	Black
PRECONFIGURED MODELS					
LEDFSS-4x4 LEDFSS-5x5 LEDFSS-6x6 LEDFSS-8x8	96.06" x 97.53" x 39.41" (2440 x 2477x 1000mm) 120.08" x 97.53" x 39.41" (3050 x 2477 x 1000mm) 144.09" x 97.53" x 39.41" (3660 x 2477 x 1000mm) 192.12" x 121.14" x 39.41" (4880 x 3077 x 1000mm)	139lb (63.2kg) 163lb (74.1kg) 222lb (100.9kg) 339lb (154.1kg)	400lb (181.8kg) 625lb (284.1kg) 900lb (409.1kg) 1600lb (727.3kg)		
LEDFSM-3x3 LEDFSM-4x4 LEDFSM-5x5	113.38" x 97.53" x 39.41" (2880 x 2477 x 1000mm) 151.18" x 97.53" x 39.41" (3840 x 2477 x 1000mm) 188.98" x 121.14" x 39.41" (4800 x 3077 x 1000mm)	143lb (65.0kg) 207lb (94.1kg) 258lb (117.3kg)	315lb (143.2kg) 560lb (254.5kg) 875lb (397.7kg)	Anodized, Powder Coat	Black
LEDFSL-2x2 LEDFSL-3x3 LEDFSL-4x4	96.06" x 97.53" x 39.41" (2440 x 2477 x 1000mm) 144.09" x 97.53" x 39.41" (3660 x 2477 x 1000mm) 192.12" x 121.14" x 39.41" (4880 x 3077 x 1000mm)	135lb (61.4kg) 215lb (97.7kg) 328lb (149.1kg)	400lb (181.8kg) 900lb (409.1kg) 1600lb (727.3kg)		

Package Specifications

• •					
UNIVERSAL SPACER*	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
LEDUNVSPACER3	5.00" x 4.375" x 38.00" (127 x 111 x 965mm)	9.5lb (4.3kg)	735029276173	Universal Spacer Kit	1
PRECONFIGURED MODELS	*Universal spacer (LEDUNVSPACER3) is sold separately.				
LEDFSS-4x4 LEDFSS-5x5 LEDFSS-6x6 LEDFSS-8x8 LEDFSM-3x3 LEDFSM-4x4 LEDFSM-5x5 LEDFSL-2x2 LEDFSL-2x2	VARIES x VARIES x 72.375" (VARIES x VARIES x 1838mm) VARIES x VARIES x 72.375" (VARIES x VARIES x 1838mm) VARIES x VARIES x 72.375" (VARIES x VARIES x 1838mm) VARIES x VARIES x 72.375" (VARIES x VARIES x 1838mm) VARIES x VARIES x 72.375" (VARIES x VARIES x 1838mm) VARIES x VARIES x 72.375" (VARIES x VARIES x 1838mm) VARIES x VARIES x 72.375" (VARIES x VARIES x 1838mm) VARIES x VARIES x 72.375" (VARIES x VARIES x 1838mm) VARIES x VARIES x 72.375" (VARIES x VARIES x 1838mm) VARIES x VARIES x 72.375" (VARIES x VARIES x 1838mm)	169lb (76.8kg) 193lb (87.7kg) 252lb (114.5kg) 369lb (167.7kg) 173lb (78.6kg) 237lb (107.7kg) 288lb (130.9kg) 165lb (75.0kg) 245lb (111.4kg)	735029358039 735029358046 735029358053 735029358060 735029358077 735029358091 735029358107 735029358107	dvLED Display Mount, Subframe and Feet	1
LEDFSL-3x3	VARIES X VARIES X 72.375 (VARIES X VARIES X 1636HIII) VARIES X VARIES X 72.375" (VARIES X VARIES X 1838mm)	358lb (162.7kg)	735029358114		

Accessories LEDTK Models: SEAMLESS Connect Universal dVLED Trim Kit

All dimensions = inch (mm)

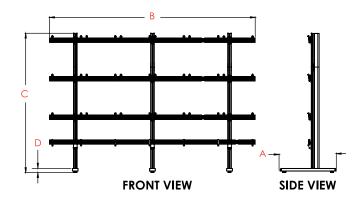

MODEL NO.	DIMENSION "A"	DIMENSION "B"	DIMENSION "C"	DIMENSION "D"	
LEDFSS-4x4		96.06" (2440mm)	97.53" (2477mm)		
LEDFSS-5x5		120.08" (3050mm)	97.53" (2477mm)		
LEDFSS-6x6	39.41" (1000mm)	144.09" (3660mm)	97.53" (2477mm)		
LEDFSS-8x8		192.12" (4880mm)	121.14" (3077mm)		
LEDFSM-3x3		113.38" (2880mm)	97.53" (2477mm)	3.03" (77mm)	
LEDFSM-4x4		151.18" (3840mm)	97.53" (2477mm)	0.00 (7711111)	
LEDFSM-5x5		188.98" (4800mm)	121.14" (3077mm)		
LEDF\$L-2x2		96.06" (2440mm)	97.53" (2477mm)]	
LEDFSL-3x3		144.09" (3660mm)	97.53" (2477mm)		
LEDFSL-4x4		192.12" (4880mm)	121.14" (3077mm)		

LEDFSS-6x6 Shown

Dimension B as fully expanded.

Horizontal Extrusions can be cut to length as needed.

Architect Specifications

The SEAMLESS Connect Universal dvLED Floor Stand shall be a Peerless-AV LEDFS models and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, kiosks, display mounts, projector mounts, carts/stands, and a full assortment of accessories. Peerless-AV 2300 White Oak Circle Aurora, IL 60502

(800) 865-2112 (630) 375-5100 Peerless-AV EMEA Unit 2 Curo Park Frogmore, St. Albans Hertfordshire, AL2 2DD

United Kingdom

+44 (0) 1923 200 100

Peerless-AV B.V. Papendorpseweg 75 3528 BJ Utrecht The Netherlands

+31 (0) 70 770 8037

Peerless-AV Latin America Av. de las Industrias 413 Parque Industrial Escobedo

Parque Industrial Escobedo General Escobedo, N.L., México, 66062



770 8037 +52 (81) 8384-8300