


LEDUNV Models



SEAMLESS CONNECT Universal dvLED Mounting System

The Peerless-AV® SEAMLESS Connect Universal dvLED Mounting System offers a sleek, flexible design for even greater installation accuracy and time savings. The LEDUNV provides an affordable solution with a patent-pending universal spacer that ensures compatibility with most latching dvLED displays. The ADA-compliant mount frame allows for X, Y, and Z axis adjustments to accommodate uneven walls and ensure a flat video wall. Its lightweight aluminum frame installs quickly, and the quick-connect clamps make securing the displays to the mount frame simple for installers. The compact packaging minimizes warehouse space requirements and typically allows for parcel shipping, reducing delivery costs. Designed for flexibility, this mounting system ensures a secure, precise, and professional display setup for any environment – From corporate lobbies, shopping centers, sports venues, concert halls, casinos, and more.

- Engineered for versatility, accommodating both corner and flat-to-wall installations
- Scalable design enables unlimited sizes and configurations
- Wall plate includes 0.5" (13mm) height adjustment to enable quick spacing corrections
- Additional 0.2" (6mm) clamp height micro-adjustment delivers perfect pixel positioning
- Optional trim kit accessory (LEDTK) offers compatibility with most displays
- When mounting to a wall is not an option, Peerless-AV® also offers a flexible range of SEAMLESS Connect Universal Substructures
- Compact packaging minimizes environmental impact, shipping costs, and storage space

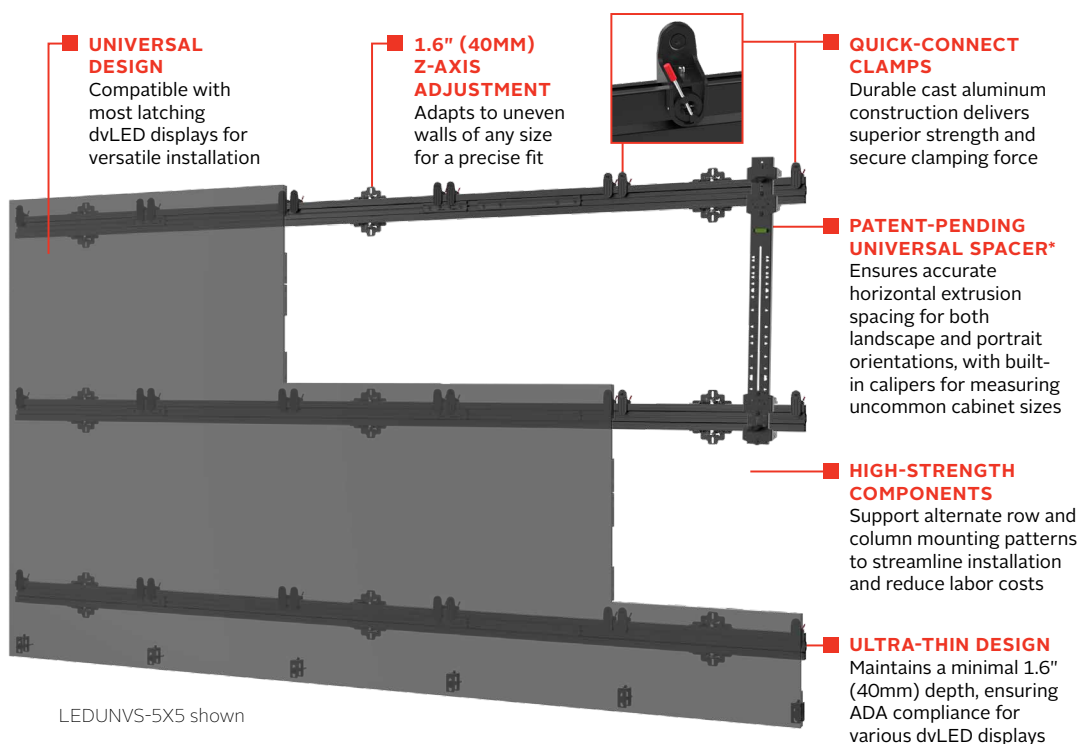

LEDUNVS-5X5 shown

**Universal spacer (LEDUNVSPACER3) is sold separately.*


Contact a Peerless-AV® Sales Representative for the current list of compatible latching dvLED display models.



Internal / external corner install



Gear mechanism provides smooth arm movement and 1.6" (40mm) of depth adjustment without binding



Included with LEDUNV and LEDUNVL, extrusion expansion joint can eliminate on-site cutting, streamlining the installation process in the majority of installs



Please visit peerless-av.com/en-us/patents for patent information.

Model Numbers

WARRANTY: 5 Years

LEDUNV Models	SEAMLESS Connect Universal dvLED Mounting System
---------------	--

LEDUNVS – for dvLED displays up to 610mm wide LEDUNVM – for dvLED displays up to 960mm wide LEDUNVL – for dvLED displays up to 1220mm wide

Product Specifications

UNIVERSAL SPACER*	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
LEDUNVSPACER3	55.55" x 3.94" x 2.50" (1411 x 100 x 64mm)	4lb (1.8kg)	NA	Powder Coat	Black
PRECONFIGURED MODELS	Product height is dependent on the display height.				
LEDUNVS-4x4 LEDUNVS-5x5 LEDUNVS-6x6 LEDUNVS-8x8	96.06" x VARIES x 1.57"-3.15" (2440 x VARIES x 40-80mm) 120.08" x VARIES x 1.57"-3.15" (3050 x VARIES x 40-80mm) 144.09" x VARIES x 1.57"-3.15" (3660 x VARIES x 40-80mm) 192.13" x VARIES x 1.57"-3.15" (4880 x VARIES x 40-80mm)	32lb (14.5kg) 54lb (24.5kg) 65lb (29.5kg) 110lb (50.0kg)	400lb (181.8kg) 625lb (284.1kg) 900lb (409.1kg) 1600lb (727.3kg)	Anodized, Powder Coat	Black
LEDUNVM-3x3 LEDUNVM-4x4 LEDUNVM-5x5	113.39" x VARIES x 1.57"-3.15" (2880 x VARIES x 40-80mm) 151.18" x VARIES x 1.57"-3.15" (3840 x VARIES x 40-80mm) 188.98" x VARIES x 1.57"-3.15" (4800 x VARIES x 40-80mm)	33lb (15.0kg) 45lb (20.5kg) 81lb (36.8kg)	315lb (143.2kg) 560lb (254.5kg) 875lb (397.7kg)		
LEDUNVL-2x2 LEDUNVL-3x3 LEDUNVL-4x4	96.06" x VARIES x 1.57"-3.15" (2440 x VARIES x 40-80mm) 144.09" x VARIES x 1.57"-3.15" (3660 x VARIES x 40-80mm) 192.13" x VARIES x 1.57"-3.15" (4880 x VARIES x 40-80mm)	26lb (11.8kg) 57lb (25.9kg) 98lb (44.5kg)	400lb (181.8kg) 900lb (409.1kg) 1600lb (727.3kg)		

Package Specifications


UNIVERSAL SPACER*	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
LEDUNVSPACER3	5.00" x 4.375" x 38.00" (127 x 111 x 965mm)	9.5lb (4.3kg)	735029276173	Universal Spacer Kit and Laser Targets	1
PRECONFIGURED MODELS	*Universal spacer (LEDUNVSPACER3) is sold separately.				
LEDUNVS-4x4 LEDUNVS-5x5 LEDUNVS-6x6 LEDUNVS-8x8	14" x VARIES x 48" (356 x VARIES x 1219mm) 14" x VARIES x 48" (356 x VARIES x 1219mm) 14" x VARIES x 48" (356 x VARIES x 1219mm) 14" x VARIES x 48" (356 x VARIES x 1219mm)	44lb (20.0kg) 69lb (31.4kg) 81lb (36.8kg) 131lb (59.5kg)	735029276180 735029276142 735029276159 735029276166	Wall Plate, Extrusion, Quick-Connect Adaptor, Standoff and Mounting Hardware	1
LEDUNVM-3x3 LEDUNVM-4x4 LEDUNVM-5x5	14" x VARIES x 48" (356 x VARIES x 1219mm) 14" x VARIES x 48" (356 x VARIES x 1219mm) 14" x VARIES x 48" (356 x VARIES x 1219mm)	46lb (20.9kg) 59lb (26.8kg) 99lb (45.0kg)	735029276197 735029276111 735029276128		
LEDUNVL-2x2 LEDUNVL-3x3 LEDUNVL-4x4	14" x VARIES x 48" (356 x VARIES x 1219mm) 14" x VARIES x 48" (356 x VARIES x 1219mm) 14" x VARIES x 48" (356 x VARIES x 1219mm)	38lb (17.3kg) 72lb (32.7kg) 117lb (53.2kg)	735029276074 735029357490 735029357506		

Accessories


LEDTK Models: SEAMLESS Connect Universal dvLED Trim Kit

All dimensions = inch (mm)


Components:




ALUMINUM EXTRUSION




ADAPTOR




WALL PLATE




STANDOFF



OPTIONAL CORNER BRACKET



PATENT-PENDING UNIVERSAL SPACER
Sold separately.

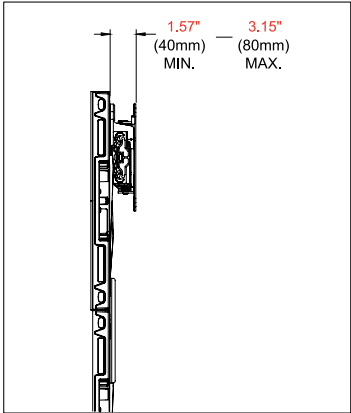

1.57" (40mm) MIN.
3.15" (80mm) MAX.

SIDE VIEW WITH dvLED DISPLAY

Architect Specifications

The SEAMLESS Connect Universal dvLED Mounting System shall be a Peerless-AV LEDUNV models and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.


Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, kiosks, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502
USA
(800) 865-2112
(630) 375-5100

Peerless-AV EMEA
Unit 2 Curo Park
Frogmore, St. Albans
Hertfordshire, AL2 2DD
United Kingdom
+44 (0) 1923 200 100

Peerless-AV B.V.
Papendorpseweg 75
3528 BJ Utrecht
The Netherlands
+31 (0) 70 770 8037

Peerless-AV Latin America
Av. de las Industrias 413
Parque Industrial Escobedo
General Escobedo, N.L.,
México, 66062
+52 (81) 8384-8300



peerless-AV®
Driving Technology Through Innovation