



# RDL®

High Performance Audio Products. Made in America.

## ACCESSORIES

### Model D SERIES-A2

### Audio Input Panel



- Wall Mounted Consumer Level Outputs
- Single or Dual Outputs from Mono Source
- Gold Plated Phono Jack Outputs

- Transformer Isolation from Source
- Audio Outputs from any RDL Line Output
- High Attenuation of Reverse Signal

**APPLICATION:** The D SERIES-A2 is a passive audio output assembly that provides one or two unbalanced consumer level audio outputs from a balanced line level audio source. It may be connected to the +4 dBu line level output of any RDL product, even if that output is simultaneously feeding other equipment. The -A2 circuit design provides a high degree of audio isolation if a user accidentally feeds a consumer-level source into the -A2. The attenuation of such reverse signals is sufficient for most installations. Active RDL modules are available for complete isolation if required. The -A2 output jacks are transformer isolated from the balanced line input, and the input shield is separated from the case ground to reduce the possibility of induced hum. The -A2 is not intended as an audio input panel.

The -A2 fits directly into back boxes, available from RDL, to fit cabinets, US or European walls (RDL WB-1U). It may also be mounted directly into cabinets or most standard US single gang electrical boxes.

Wherever style, performance, and value are required for wall or cabinet mounted audio outputs, the -A2 is the ideal choice. Use them individually or in conjunction with other RDL products as part of a complete audio/video system.




# RDL<sup>®</sup>

High Performance Audio Products. Made in America.

## ACCESSORIES Model D SERIES-A2 Audio Input Panel

## Installation/Operation

**CE** Declaration of Conformity available from rdlnet.com.  
Sole EMC specifications provided on product package.  
Specifications are subject to change without notice.

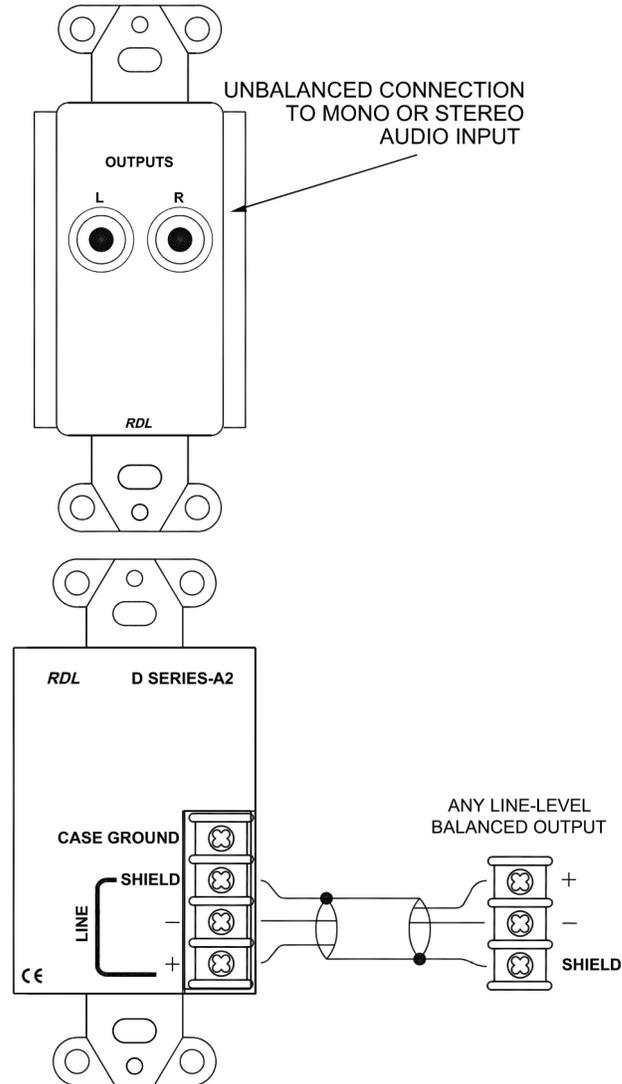

### TYPICAL PERFORMANCE

Input Level:	+4 dBu, nominal
Input Connector:	Full size barrier block
Input Impedance:	10 k $\Omega$ balanced bridging, monaural
Output Connectors (2):	Phono jacks with gold contacts
Input Connections (4):	CASE GROUND, SHIELD, +, -
Frequency Response:	50 Hz to 20 kHz (+/- 1 dB)
Attenuated Signal – Reverse Path:	< -50 dB (at 150 $\Omega$ balanced source output, +4 dBu reference, -10 dBV signal injected into output jack)
Power Requirement:	Passive
Overall Dimensions D SERIES-A2:	Height: 4.13 in 10.49 cm
	Width: 1.7 in 4.32 cm
	Depth: 1.75 in 4.45 cm

Safety Instructions/Consignes de sécurité/  
Instrucciones de seguridad/Sicherheitshinweise:



EU Importer:  
Importateur de l'UE:  
Importador de la UE:  
EU-Importeur:

RDL Europe B.V.  
Joan Muyskenweg 124  
1114 AN Amsterdam