



RDL®

High Performance Audio Products. Made in America.

ACCESSORIES

Models D SERIES-J1, D SERIES-J2, D SERIES-J3 & D SERIES-J3M AUDIO INPUT PANELS

D SERIES-J1



- Wall Mounted Microphone Input
- XLR Input Connector with Gold Contacts
- Barrier Block Wiring Connections
- Ground-Lift Terminals on Barrier Block

The D SERIES-J1 is a complete microphone input panel assembly. Connections to the female front-panel XLR jack are made on a rear barrier block. Four terminals are provided: CASE GROUND, SHIELD (XLR pin 1), + (XLR pin 2) and - (XLR pin 3). The installer may install a jumper between the pin 1 connection and CASE GROUND if desired. The back of the -J1 is finished with a metal enclosure clearly labeled for easy installation.

D SERIES-J2



- Wall Mounted Mic and Line-Level Audio Input Panel
- Gold Plated Phono Jacks
- Hum Cancellation on Unbalanced Line Inputs
- Transformer Isolation for Unbalanced Line Inputs
- Balanced Output for Unbalanced Line Inputs

The D SERIES-J2 is a complete unbalanced line-level audio input panel assembly. The front panel features two phono jacks, intended for mono or stereo consumer level sources. LEFT and RIGHT are combined and balanced through audio transformers configured to reject induced hum. The line-level output is provided on the rear-panel barrier block for connection to 10 kΩ or higher input impedance line level module or equipment inputs.

D SERIES-J3



- Wall Mounted Mic and Line-Level Audio Input Panel
- XLR Microphone Input with Gold Contacts
- Gold Plated Phono Jack Line Inputs
- Hum Cancellation on Unbalanced Line Inputs
- Transformer Isolation for Unbalanced Line Inputs
- Balanced Output for Unbalanced Line Inputs

The D SERIES-J3 is a complete audio input panel assembly. The XLR is connected directly to the rear-panel barrier block. The phono inputs are combined and balanced through audio transformers configured to reject induced hum. The line-level output is provided on the rear-panel terminal block for connection to 10 kΩ or higher input impedance line level module or equipment inputs.

D SERIES-J3M



- Wall Mounted Mic and Line-Level Audio Input Panel
- XLR Microphone Input with Gold Contacts
- MiniJack Line Inputs
- Hum Cancellation on Unbalanced Line Inputs
- Transformer Isolation for Unbalanced Line Inputs
- Balanced Output for Unbalanced Line Inputs

The D SERIES-J3M is a complete audio input panel assembly. The XLR is connected directly to the rear-panel barrier block. The Mini-jack Left and Right are combined and balanced through audio transformers configured to reject induced hum. The line-level output is provided on the rear-panel terminal block for connection to 10 kΩ or higher input impedance line level module or equipment inputs.



RDL[®]


High Performance Audio Products. Made in America.

Installation/Operation

CE Declaration of Conformity available from rdlnet.com.
Sole EMC specifications provided on product package.
Specifications are subject to change without notice.

ACCESSORIES

Models D SERIES-J1, D SERIES-J2, D SERIES-J3 & D SERIES-J3M AUDIO INPUT PANELS

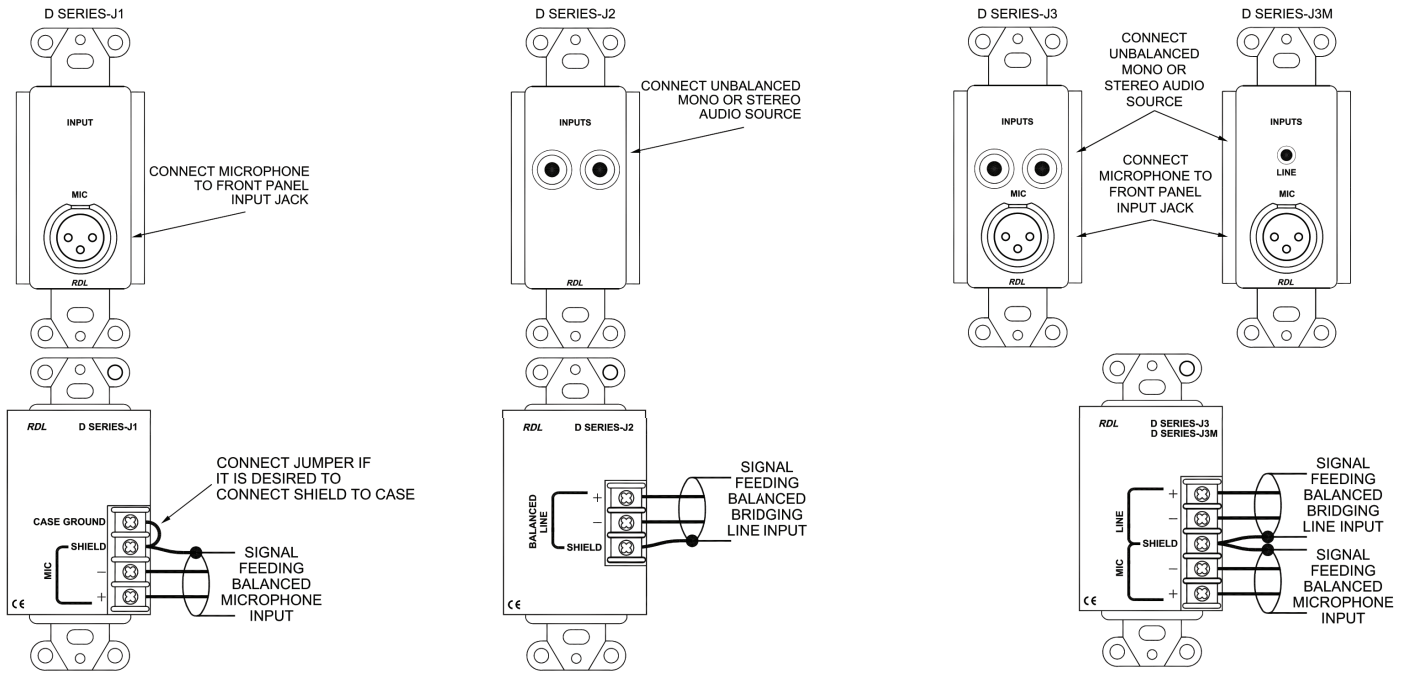

TYPICAL PERFORMANCE

D SERIES-J1

Input connector (1): XLR female gold contacts
Output connector: Full size barrier block
Output connections (4): CASE GROUND, SHIELD (XLR pin 1), + (XLR pin 2), - (XLR pin 3)

D SERIES-J2

Input connectors (2): Phono jacks with gold contacts
Output connector: Full size barrier block
Output connections (3): +, -, SHIELD
Frequency response: 30 Hz to 20 kHz (± 1 dB line level)

D SERIES-J3

Input connectors (3): XLR female with gold contacts (1), Phono jacks with gold contacts (2)
Output connector: Full size barrier block
Output connections:

Line: +, -, SHIELD
Mic: SHIELD (XLR Pin 1), + (XLR Pin 2), - (XLR Pin 3)

Frequency response: 30 Hz to 20 kHz (± 1 dB line level)

D SERIES-J3M

Input connectors (2): XLR female with gold contacts (1), Mini-jack 3.5 mm (1)
Output connector: Full size barrier block
Output connections:

Line: +, -, SHIELD
Mic: SHIELD (XLR Pin 1), + (XLR Pin 2), - (XLR Pin 3)

Frequency response: 30 Hz to 20 kHz (± 1 dB line level)

Power Requirement: Passive (all models)

Overall Dimensions D SERIES:

Height:	4.13 in	10.49 cm
Width:	1.7 in	4.32 cm
Depth:	1.75 in	4.45 cm:

Safety Instructions/Consignes de sécurité/
Instrucciones de seguridad/Sicherheitshinweise:



EU Importer:
Importateur de l'UE:
Importador de la UE:
EU-Importeur:

RDL Europe B.V.
Joan Muyskenweg 124
1114 AN Amsterdam