

## DM-1200

### DYNAMIC MICROPHONE



The DM-1200 microphone is designed for speech applications and features high intelligibility.


### Key features

- Switching and handling noise suppression
- XLR-connector and a 10 m cable with phone plug

## Specifications

Type	Moving coil microphone
Directivity	Unidirectional
Impedance	600 $\Omega$ , balanced
Sensitivity	-52 dB (1 kHz 0 dB=1 V/Pa)
Frequency Response	50 Hz - 12 kHz
Cable	Single-core shielded cable, unbalanced
Cable Length	10 m
Output Terminal	Phone plug
Talk Switch	Short-off, slide switch
Finish	Body: Die-cast zinc, metallic gray Head: Die-cast aluminum/zinc-plated steel wire, metallic gray
Dimensions	Ø39.5 x 163 mm (microphone body)
Weight	265 g (without connection cable)
Included Accessories	Microphone holder (U5/16, NS5/8, W3/8)...1

Dimensions

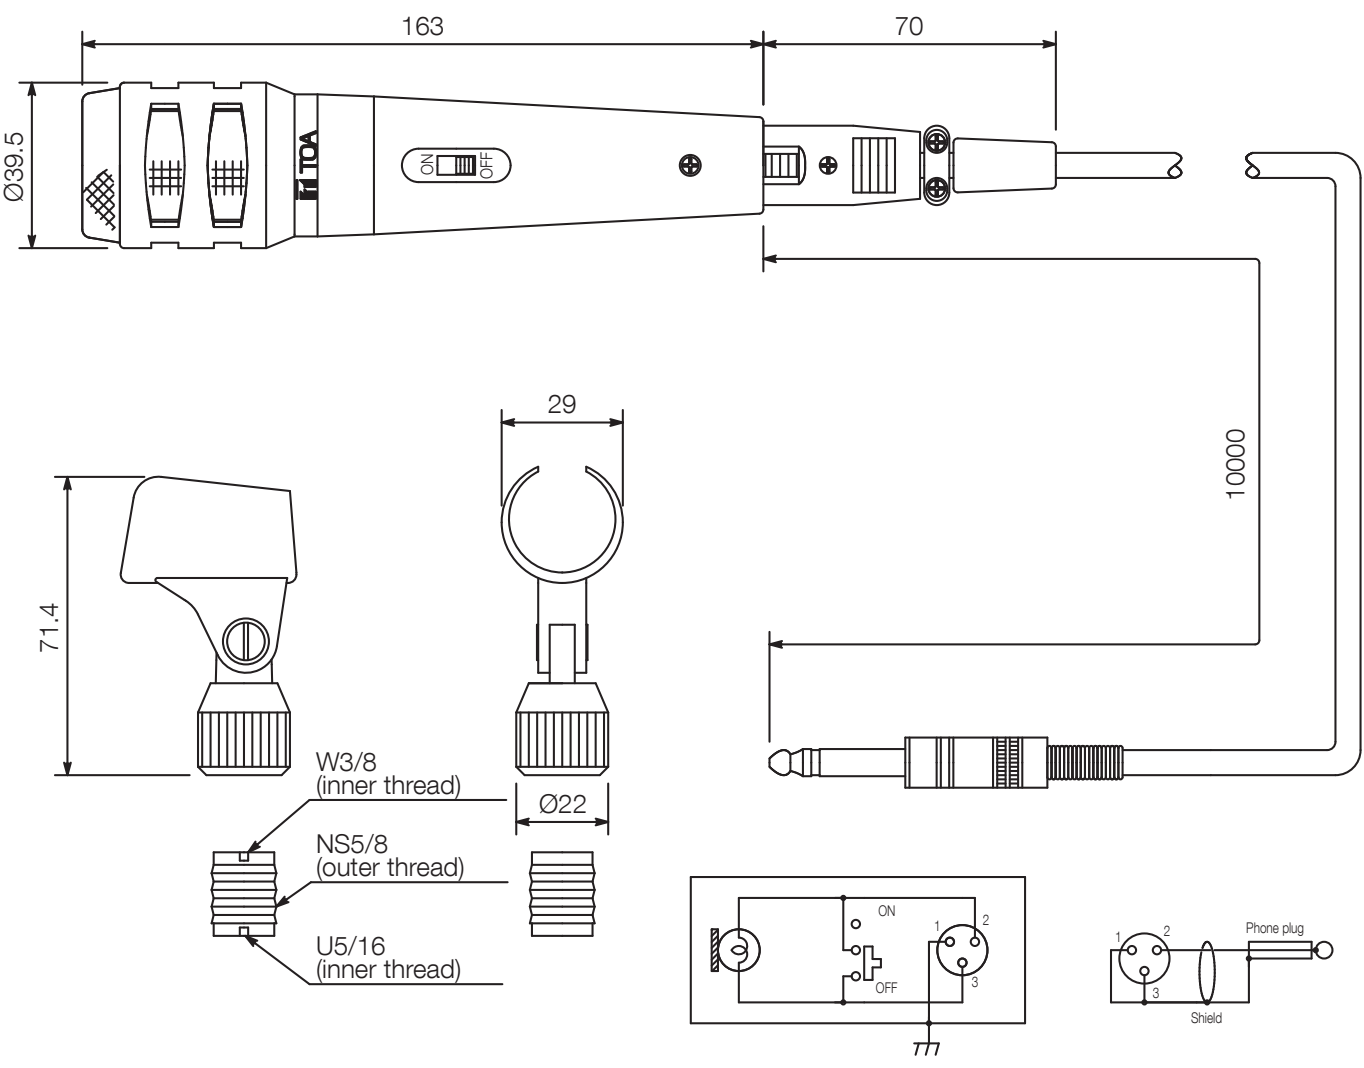

UNIT:mm SCALE:1/2

Circuit Diagram

## A&E specifications

Dynamic handheld microphone in rugged zinc die-cast enclosure, effective suppression of handling noise, wind / pop screen, special extremely low-noise switch, XLR connector, incl. 10 m cable with female XLR / phone plug and stand clamp.