

DT-940 -CU

AM/FM TUNER



The DT-940 is an AM/FM radio tuner. 20 receiving channels each of AM and FM broadcasts can be stored in memory, which can be recalled by one-touch key operation. The unit can be mounted on an EIA equipment rack using the optional MB-15B Rack Mounting Bracket


Key features

- Presets for any combination of 20 AM (monaural) and 20 FM (capable of receiving stereo broadcast) stations
- Automatic station scanning and manual tuning
- Automatic station storage to memory using auto-scan mode
- Frequency synthesized digital tuning with multi-function digital display
- Stereo output is available
- FM wire antenna and AM loop antenna included
- Front panel lockout feature prevents unauthorized operation

Specifications

Power Source	120 V AC, 60 Hz (use of the supplied AC adapter)
Power Consumption	60 mA (when the supplied AC adapter is used)
Receiving Frequency	FM: 87.9 – 107.9 MHz (100 kHz step) AM: 520 – 1710 kHz (10 kHz step)
Antenna Input	FM: 75 Ω (unbalanced), F type connector AM: Loop antenna (balanced)/external antenna (unbalanced), push type termina
Audio Output	Stereo: -15 dB*1, 10 k Ω , unbalanced, RCA jack Monaural: -10 dB*1, 10 k Ω , balanced, M3 screw terminal, distance between barriers: 6.4 mm (0.25")
Channels of Memory	20 channels for AM, 20 channels for FM
Operating Temperature	0 to 40°C (32 to 104°F)
Operating Humidity	90 %RH or less (no condensation)
Finish	Panel: Aluminum (hair-line finish), black Case: Pre-coated steel plate, black
Dimensions	420 (w) x 50.8 (h) x 295.2 (d) mm (16.54" x 2" x 11.62")
Weight	2.9 kg (6.39 lb)

Dimensions

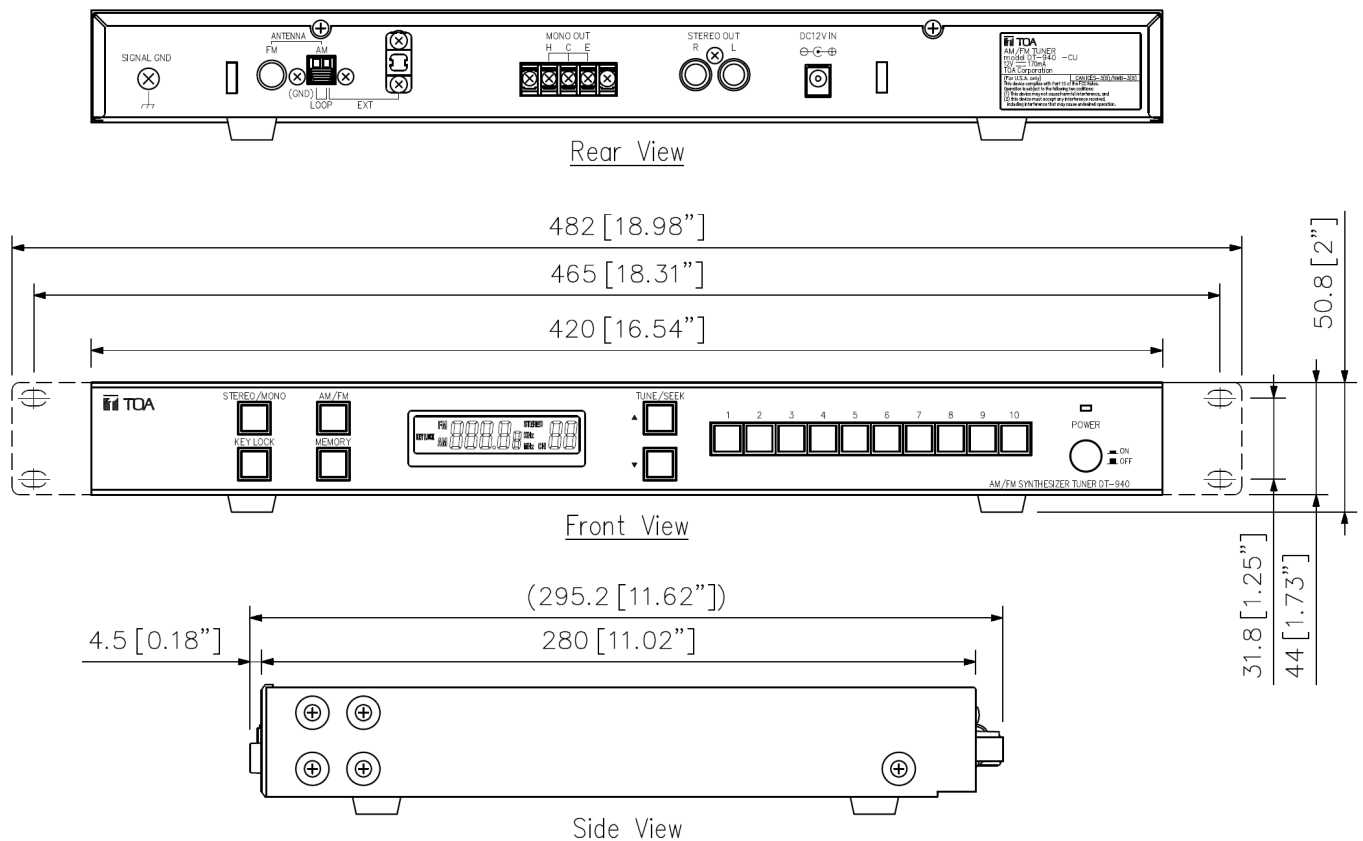

UNIT: mm

Note: Numerical values in parentheses are for reference only.