

## HA-2120EN

LONG RANGE ARRAY SPEAKER 120W



The HA-2120EN is composed of multiple horn speakers positioned in an array. It is a highly efficient speaker. Clear voice can be transmitted to a distant place without acoustic correction. The built-in high-pass filter cuts the bass that can damage the speaker. Drip-proof structure, and a salt-resistant paint finish, it has excellent durability in an outdoor permanent environment.

The HA-2120EN is certified to the European Standard EN 54-24: 2008, Loudspeaker for voice alarm systems for fire detection and fire alarm systems

In compliance with the British Standard BS 5839-8: 2008. DoP number is 23-104.

### Key features



- Horn array for clear long-range voice projection
- IP66-rated for harsh outdoor use
- Weatherproof durability with double drip-proof design and saltresistant paint finish
- Wide horizontal coverage for broad-area public address applications
- Built-in high-pass filter for speaker protection
- EN 54-24 compliant for evacuation systems
- Optional mounting bracket for flexible installation

## Specifications

|                         |   |
|-------------------------|---|
| Rated Input             | 120 W   |
| Rated Impedance         | 100 V line: 83 Ω (120 W), 170 Ω (60 W)<br>70 V line: 42 Ω (120 W), 83 Ω (60 W)  |
| Sensitivity             | 113 dB (1 W, 1 m) (500 Hz - 5 kHz, IEC60268-5)  |
| Max. SPL                | 133 dB (120 W, 1 m) (500 Hz - 5 kHz, IEC60268-5)  |
| Frequency Response      | 550 Hz - 4.3 kHz (-10 dB), 290 Hz - 8 kHz (-20 dB)  |
| Speaker Component       | Horn speaker unit x 3   |
| Input Terminal          | Ceramic terminal (3-pole), can be bridge-connected x1, Ceramic terminal (2-pole) x 1, Thermal fuse is included.   |
| Cable Gland             | Size: PG 13.5 - 12 (gray) x 1, Cable Diameter Range: 12.5 - 6.5 mm (0.49" - 0.26")<br>Size: PG 13.5 - 08 (black) x 1, Cable Diameter Range: 9 - 4.5 mm (0.35" - 0.18"), Two cable glands are factory-installed.   |
| Speaker Cable           | 4-core cabtype cord 2 m (6.56 ft)   |
| Compatible Wire         | For Ceramic terminal (3-pole), Conductor: Solid wire or 7-core wire<br>No bridge connection: 0.8 - 10 mm <sup>2</sup> (AWG 18 - 7) for solid wire, 0.8 - 8 mm <sup>2</sup> (AWG 18 - 8) for 7-core wire<br>Bridge connection: 0.8 - 2.5 mm <sup>2</sup> (AWG 18 - 13) for solid wire, 0.8 - 1.5 mm <sup>2</sup> (AWG 18 - 15) for 7-core wire |
| IP Code                 | IP66  |
| EN 54-24 Specifications | Sensitivity: 91 dB (1 W, 4 m), Max. SPL: 110 dB (120 W, 4 m)<br>Coverage Angle (-6 dB):<br>Horizontal: 200° (500 Hz), 120° (1 kHz), 65° (2 kHz), 40° (4 kHz)<br>Vertical: 80° (500 Hz), 40° (1 kHz), 20° (2 kHz), 15° (4 kHz)<br>Environmental Type: B (outdoor applications)<br>IP Code: IP33C   |
| Operating Temperature   | -20 °C to +55 °C (-4 °F to 131 °F)  |
| Finish                  | Case: FRP, white (RAL 9016 equivalent), paint<br>Front grille: Aluminum, white (RAL 9016 equivalent), paint, Bolts: Stainless steel   |
| Dimensions              | 215 (W) X 555 (H) X 309 (D) mm (8.46" X 21.85" X 12.17") (excluding projection)   |
| Weight                  | 16 kg (35.27 lb) (unit only)  |
| Included Accessories    | Terminal box x 1  |
| Optional Accessories    | Speaker mounting bracket: YS-1100A  |


Notes: The speaker must be installed upright or facing down. Installing the speaker in any other position may render the drainage hole ineffective, eventually leading to an electrical failure or other damage.

## Dimensions

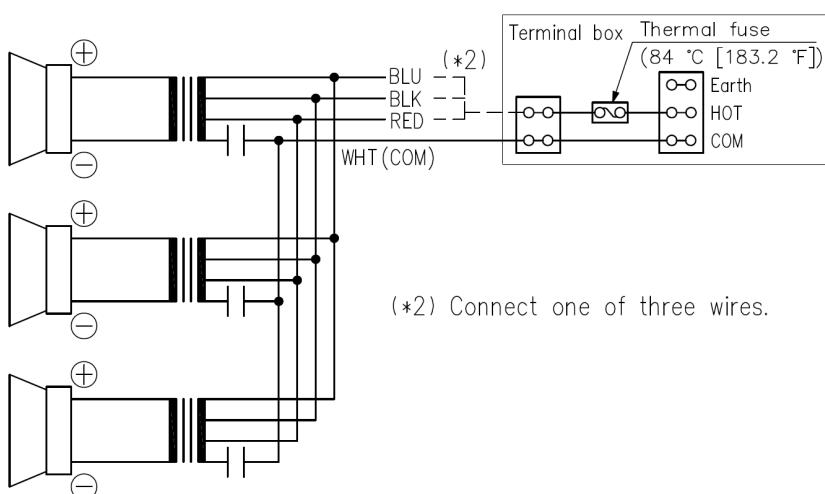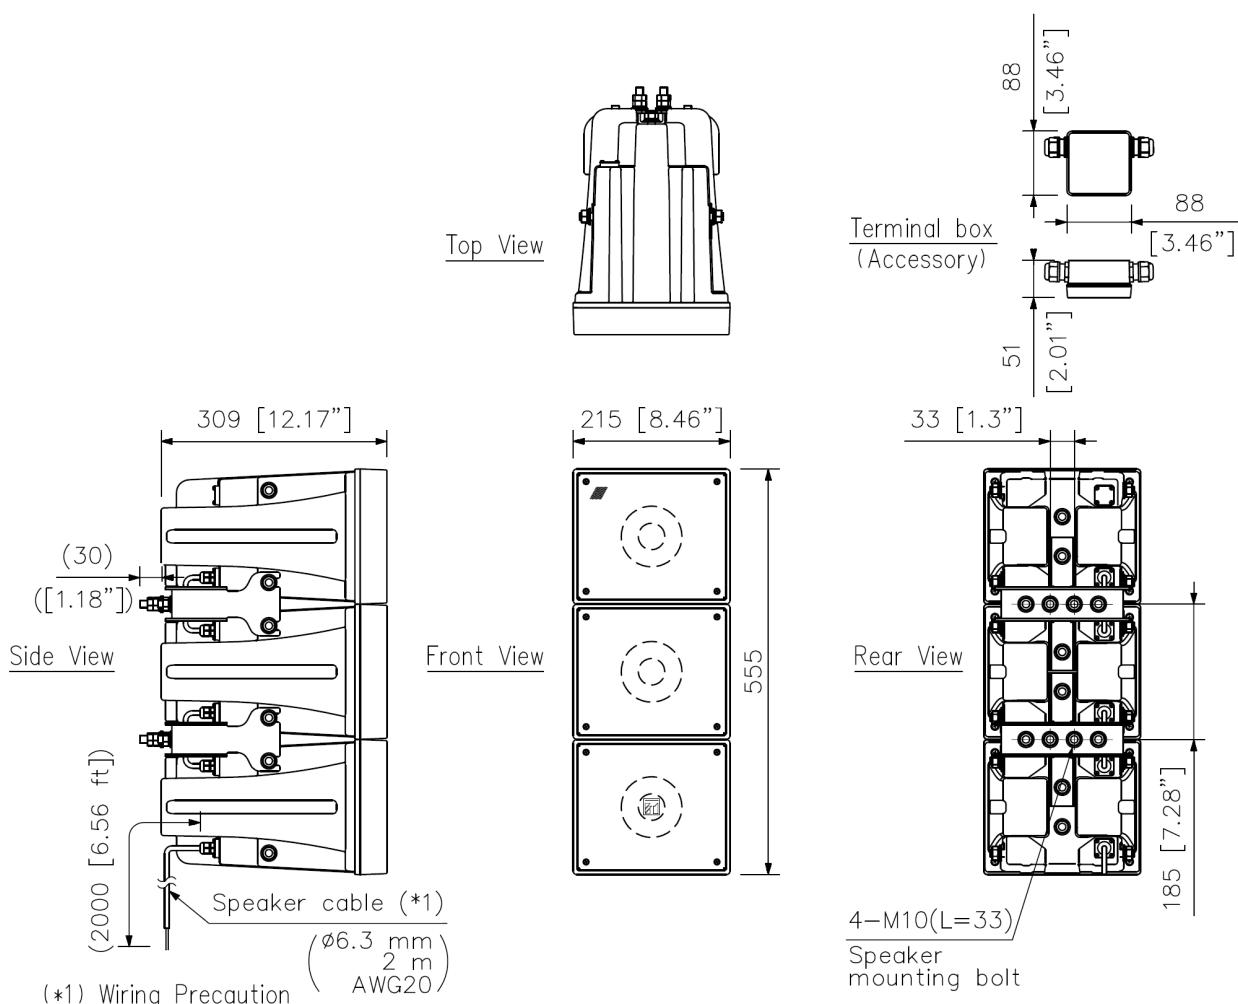

|     | Imp.  | 100 V line | 70 V line |
|-----|-------|------------|-----------|
| RED | 42 Ω  | —          | 120 W     |
| BLK | 83 Ω  | 120 W      | 60 W      |
| BLU | 170 Ω | 60 W       | —         |
| WHT |       | COM        |           |

Note: Route the speaker cables in as short a configuration as possible by securing them to nearby brackets or other firmly fixed parts. Longer wiring distances may result in cable breakage due to strong winds or other potentially harmful conditions.

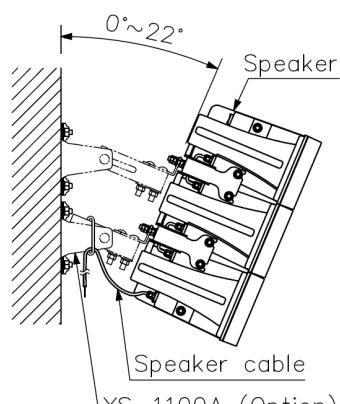

UNIT: mm

Note: Numerical values in parentheses are for reference only.

## A&E specifications

The Long Range Array Speaker shall be designed for outdoor public address and emergency voice alarm systems requiring high intelligibility and long-distance coverage. The speaker shall incorporate three horn speaker units arranged in a vertical array to achieve narrow vertical and wide horizontal directivity.

The speaker shall have a rated input of 120 W and support 100 V and 70 V line systems with selectable impedance settings of 83  $\Omega$  (120 W) and 170  $\Omega$  (60 W) for 100 V, and 42  $\Omega$  (120 W) and 83  $\Omega$  (60 W) for 70 V. Sensitivity shall be 113 dB (1 W, 1 m), and maximum SPL shall be 133 dB (120 W, 1 m).

The frequency response shall be 550 Hz – 4.3 kHz (-10 dB) and 290 Hz – 8 kHz (-20 dB). The speaker shall include a built-in high-pass filter for speaker protection. Coverage angle shall be 120°(1 kHz) for horizontal and 40°(1 kHz) for vertical. The speaker shall comply with EN 54-24 standards.

Input terminals shall be ceramic type, consisting of one 3-pole and one 2-pole terminal, and shall include a thermal fuse. The enclosure shall be made of FRP with a white RAL 9016 finish and aluminum front grille. The speaker shall be IP66-rated for dust and water protection.

The operating temperature range shall be -20 °C to +55 °C (-4 °F to +131 °F).

Dimensions shall be 215 (W) x 555 (H) x 309 (D) mm (8.46" x 21.85" x 12.17"), and weight shall be 16 kg (35.27 lbs).

Optional extras: Speaker Mounting Bracket (YS-1100A)

Manufacturer: TOA Corporation

Model: HA-2120EN