

## RS-150

### SUB STATION



The RS-150 can call and converse with the registered master stations. It utilizes a 2-core shielded cable.


### Key features

- Cost-effective
- Indoor use
- Half-duplex conversation

## Specifications

Rated Input	1 W
Rated Impedance	625 $\Omega$ (1 W/25 V)
Internal Speaker	4 cm cone-type
Wiring	Two-core shielded cable
Transmission Range	0.5 km (546 yd)/#0.5 mm (AWG24) 0.8 km (874 yd)/#0.65 mm (AWG22) 1.3 km (1421 yd)/#0.9 mm (AWG19)
Operating Temperature	-10 # to +50 # (Temperature range not to freeze the speaker and switch)
Finish	Panel: Stainless steel, hairline Call button: Resin
Dimensions	120 (W) x 120 (H) x 48.5 (D) mm
Weight	410 g
Included Accessories	Box mounting screw (No.6-32UNC x 18) .....4, Box mounting screw (M4 x 25) .....4
Compatible Box	For flush-mount: 2-gang electrical box YC-302 (option) For surface-mount: Indoor wall-mount box YC-822 (option)

## Dimensions

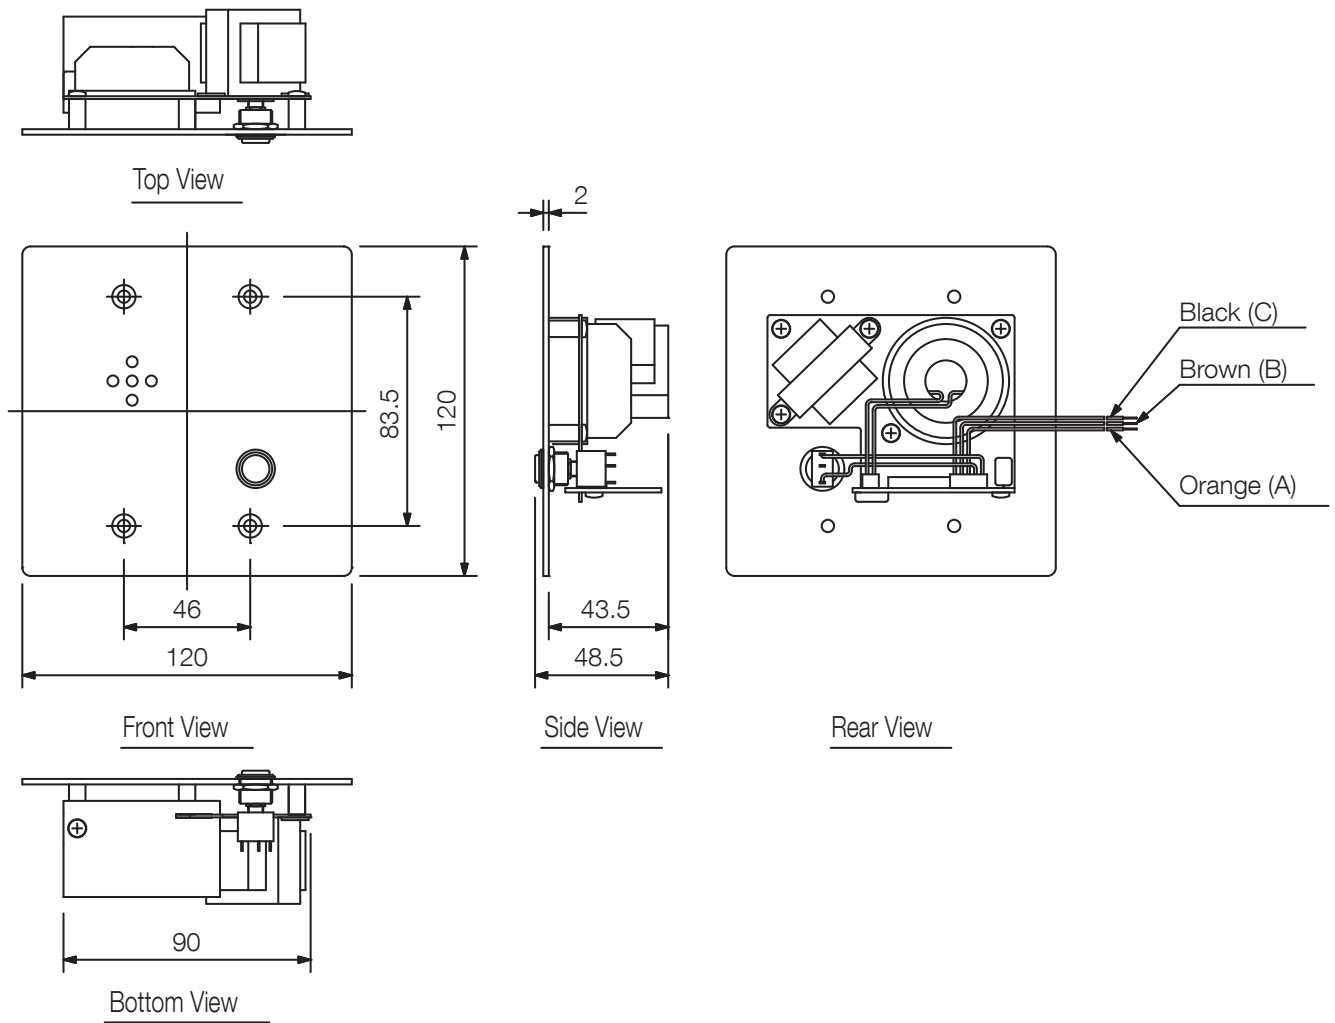

UNIT:mm

SCALE:1/3

## A&E specifications

\*UNDEFINED TEXT\*