

## SR-C15B

### LINE ARRAY SPEAKER



The SR-C15B Sub-woofer system is designed to be used in conjunction with the SR-C8L or SR-C8S Line array speaker. Recommended digital speaker processor is the DP-SP3 (option).



### Key features

- 38cm (15") subwoofer
- Input connectors include screw terminal connections and two Neutrik NL4 type sockets
- High power handling
- Enclosure equipped with M8 threaded steel plates for the secure attachment of optional accessory brackets
- Accessory brackets for suspension and stand mounting

## Specifications

Enclosure	Bass-reflex type
Power Handling	Continuous program: 450 W
Rated Impedance	8 $\Omega$
Sensitivity	93 dB (1 W, 1 m)
Frequency Response	40 - 400 Hz (when recommended parameters are applied by the optional DP-SP3)
Crossover Frequency	125 Hz (when recommended parameters are applied by the optional DP-SP3)
Speaker Component	38 cm (15) cone-type
Input Connector	M4 screw terminal, distance between barriers: 10.0 mm (0.39") and Neutrik NL4MPXX x 2
Finish	Enclosure: Plywood, black, urethane paint Front grille: Punched steel plate, black, paint
Dimensions	526.6 (W) x 594.8 (H) x 550 (D) mm (20.73 x 23.42" x 21.65")
Weight	41 kg (90.39 lb)
Included Accessories	M8 connection bolt ...4
Optional Accessories	Rigging frame: SR-RF8

Dimensions

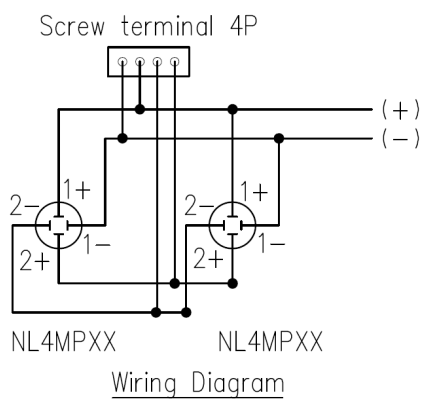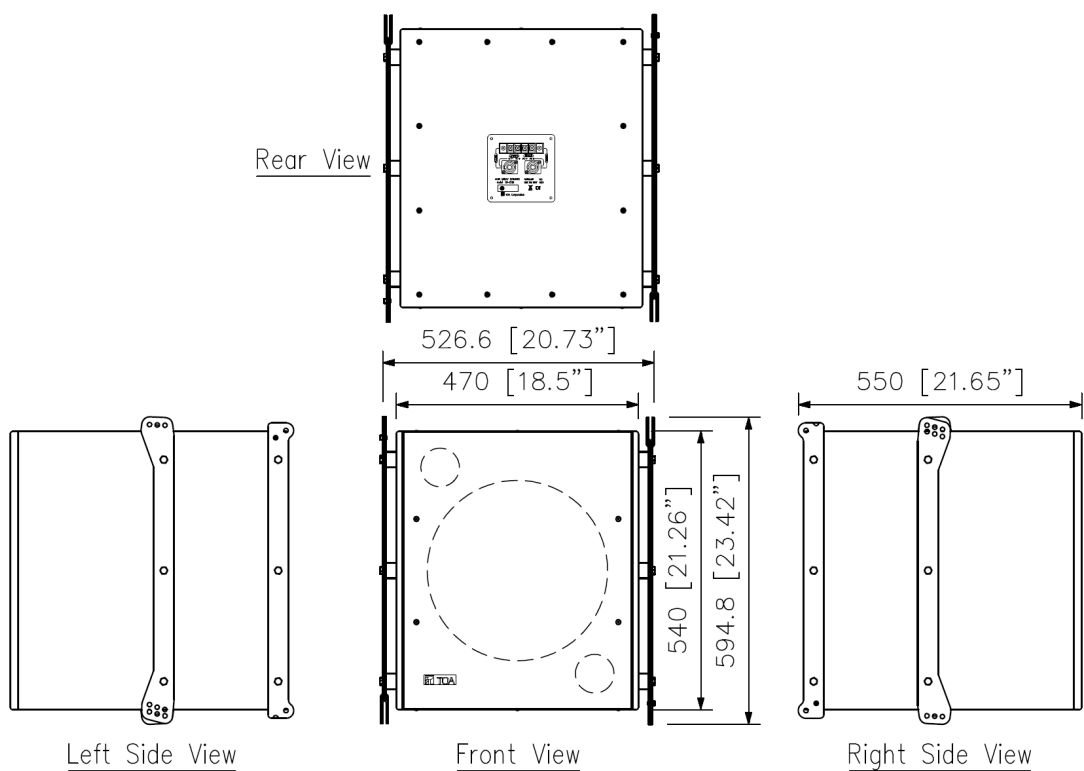

UNIT:mm

## A&E specifications

The speaker shall be sub-woofer system. The component shall consist one 15" (38 cm) woofer. The speaker input connectors shall include screw terminal connections and two Neutrik NL4 type sockets. The speaker shall meet the following performance criteria. Power handling: 450 W continuous program. Frequency response (10 dB below rated pressure sensitivity, with recommended crossover and equalization) 40 to 400 Hz. Sensitivity (1 W at 1 m): 93 dB. Impedance: 8 ohms nominal.

The speaker enclosure shall be made of plywood and finished with black urethane paint. The speaker grille shall be made from a single punched steel plate and finished with black paint. The dimensions (W x H x D) shall be 526.6 x 594.8 x 550 mm (20.73" x 23.42" x 21.65") and weight (including accessory brackets) shall be 41 kg (90.39 lbs.). The speaker enclosure shall be equipped with M8 threaded steel plates for the secure attachment of optional accessory brackets. Available accessory brackets for suspension and stand mounting shall be made of steel.

The loudspeaker shall be TOA model SR-C15B.

The rigging frame shall be TOA model SR-RF8.