


## U-11R

### AUX PREAMPLIFIER MODULE

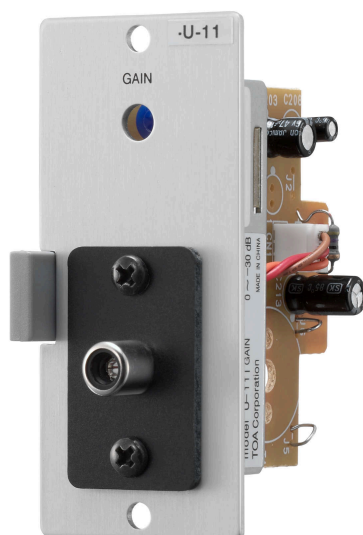

The U-11R is a line input module to be used in conjunction with the 900 series components and other TOA's equipment. It has an unbalanced line input with RCA pin jack connector, mute-receive function and gain control.


### Key features

# Specifications

\* 0 dB=1 V

Power Supply	24 V DC (supplied from the main frame)
Current Consumption	9 mA
Input Sensitivity	-20 dB* (rated output: -20 dB*), adjustable: -20 to +10 dB*
Input Impedance	220 kΩ, unbalanced
Frequency Response	20 Hz - 20 kHz ±1.5 dB
Distortion	0.05 % or less (1 kHz, output: 0 dB*)
Noise Level	-100 dB* (20 Hz - 20 kHz BPF)
Gain	-30 - 0 dB
Connector	RCA pin jack (1P)
Dimensions	35 (W) x 78 (H) x 88 (D) mm (1.38" x 3.07" x 3.46")
Weight	Max. 55 g (0.12 lb)

# Dimensions

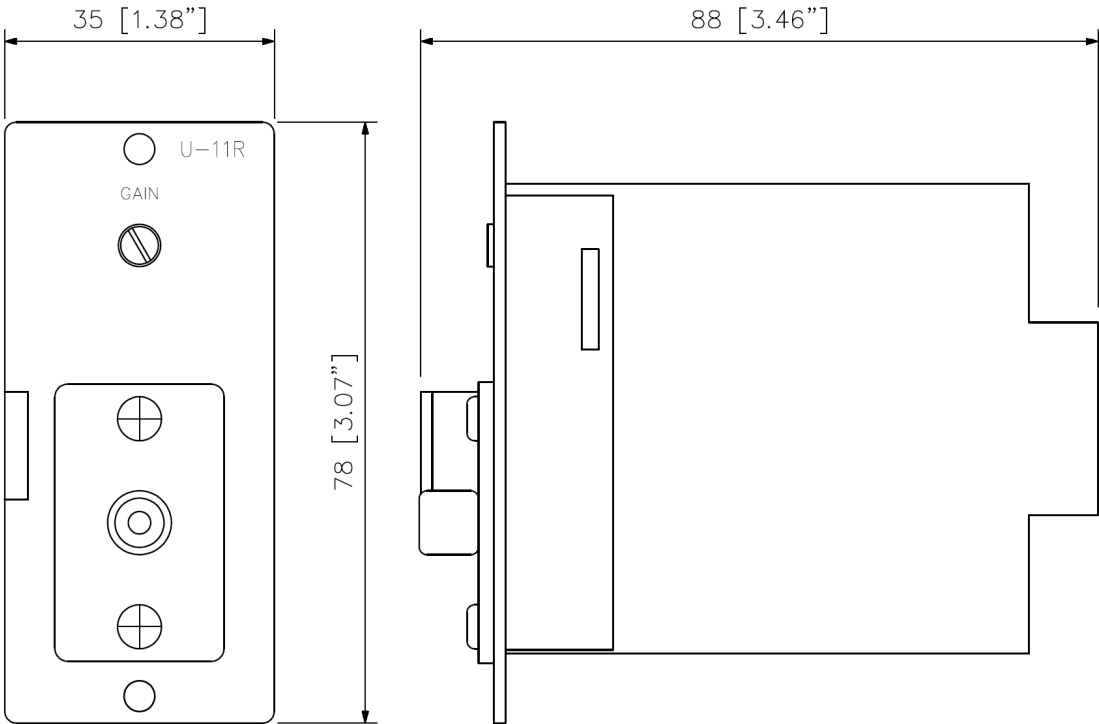

Front View

Side View

UNIT:mm