

MP-032B

MONITOR PANEL



The MP-032B is a monitor panel that is designed to provide aural and visual monitoring for multi-channel sound and program system.


Key features

- Passive monitor panel for speaker line level
- Monitors up to 10 separate channels or 10 amplifiers
- Large easy-to-read watt meter for adjusting output level
- Additional audio monitoring with built-in 5" full range speaker

Specifications

Functions	Aural/visual monitoring (up to 10 power amplifiers)
Control	Channel selector switch Monitor volume control Watt meter Line voltage selector switch
Input	25 V (625 Ω), 50 V (2.5 k Ω), 70 V (5 k Ω), 100 V (10 k Ω), switchable
Speaker	Full-range 12 cm speaker
Terminal	M4 screw terminals, distance between barriers: 8.8 mm
Finish	Surface-treated steel plate, black
Dimensions	483(W) x 133(H) x 87(D) mm
Weight	2.2 kg
Included Accessories	Rack mounting screw (with washer) x 4

Dimensions

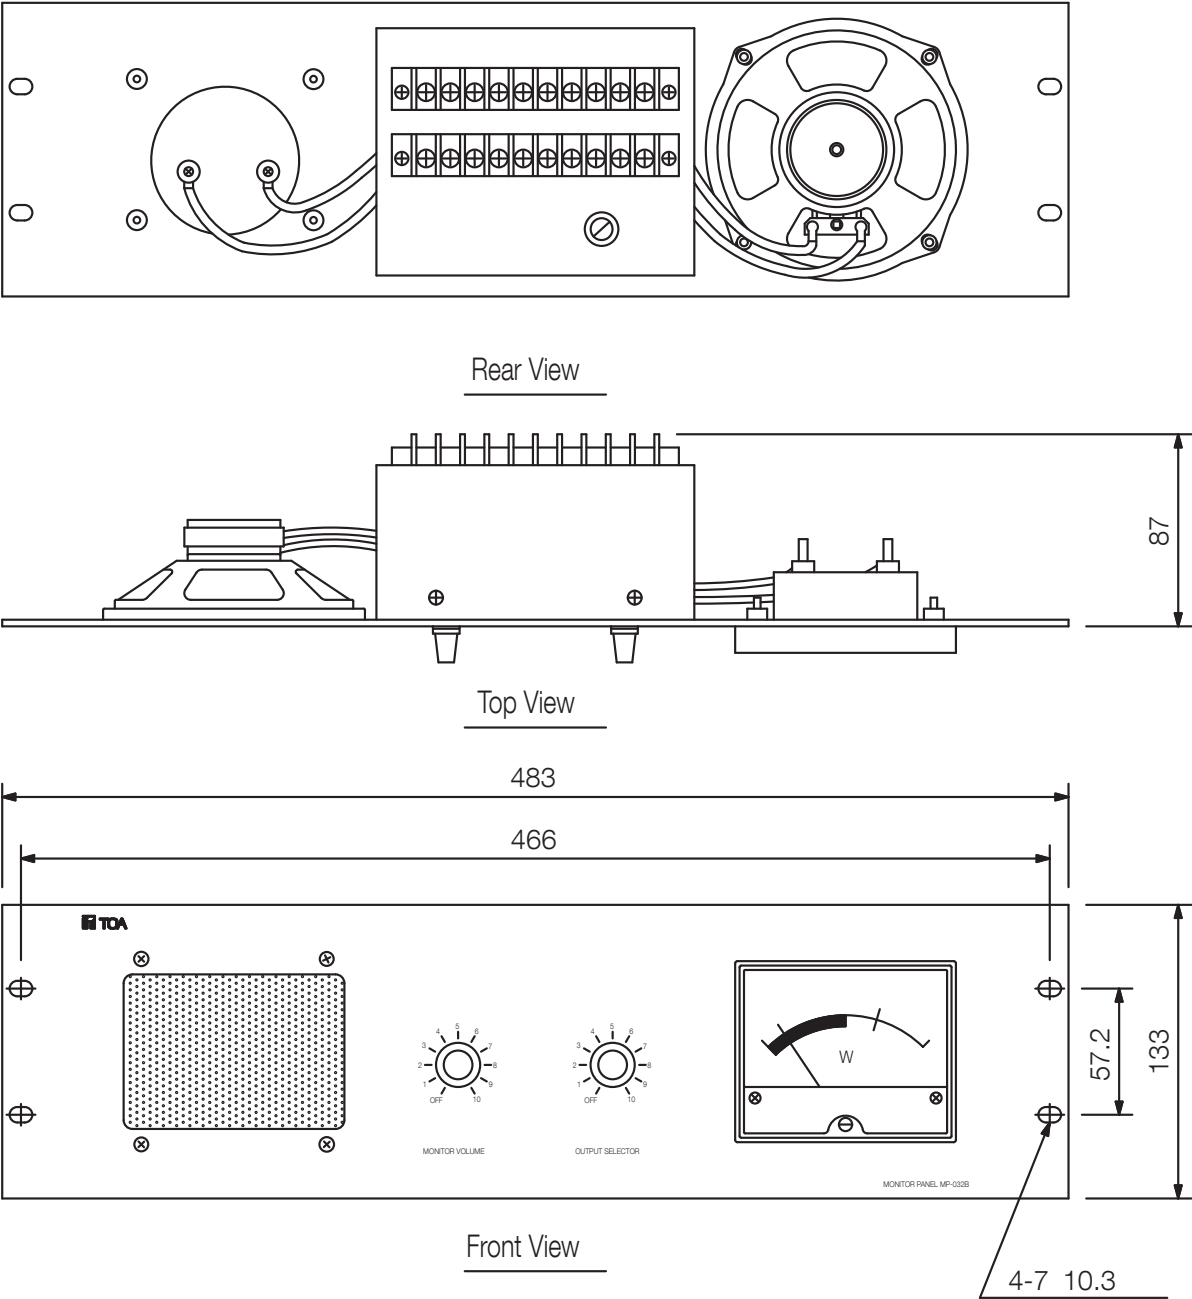

UNIT:mm SCALE:1/4

A&E specifications

UNDEFINED TEXT