WP-700-AM

Remote Control Panel
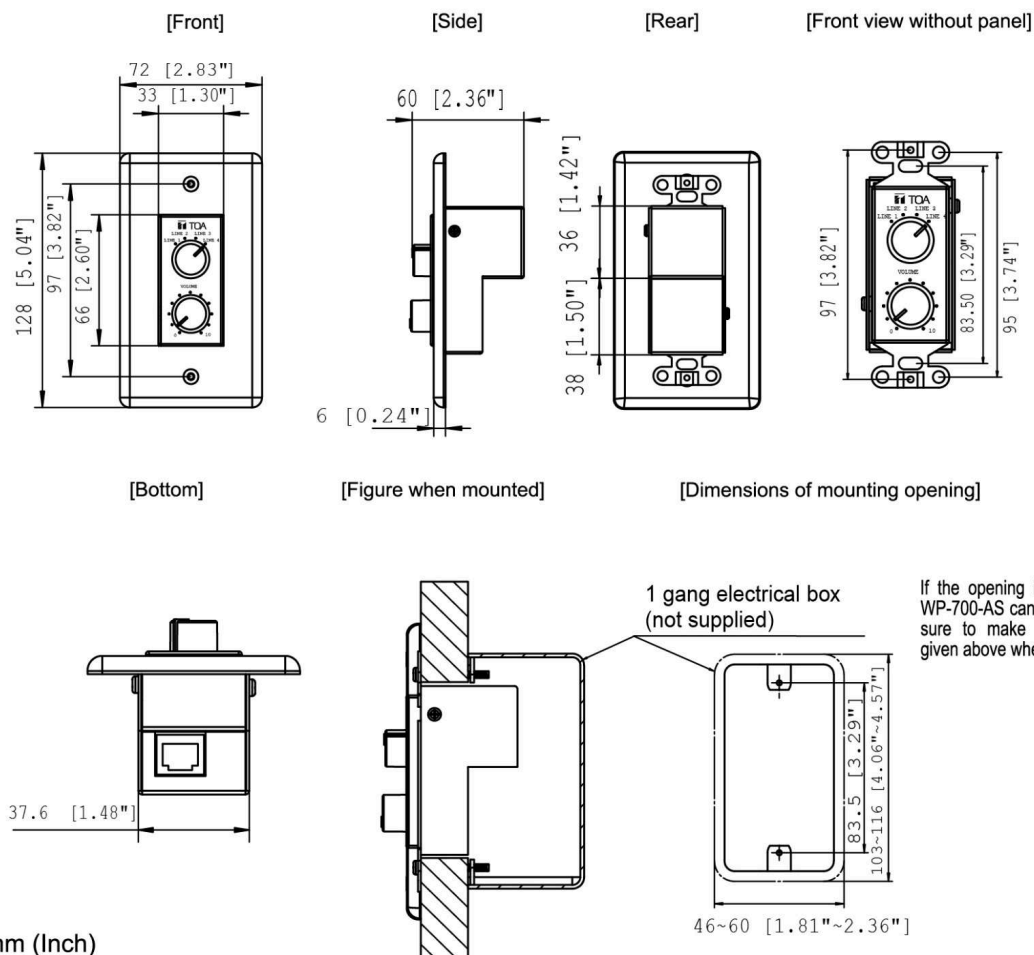

Remote Control Panel is a remote control switch/ volume panel designed to be used with the MA-725F or MM-700F amplifiers. Provides remote select input source and adjusts volume levels through an Ethernet cable. It can be mounted in a 1-gang electrical box.

Key features

Specifications

Dimensions

[Front]   [Side]   [Rear]   [Front view without panel]

72 [2.83"]
33 [1.30"]
128 [5.04"]
97 [3.82"]
66 [2.60"]

60 [2.36"]
6 [0.24"]

36 [1.42"]
38 [1.50"]

97 [3.82"]
83.50 [3.29"]
95 [3.74"]

[Bottom]   [Figure when mounted]   [Dimensions of mounting opening]

37.6 [1.48"]

1 gang electrical box
(not supplied)

If the opening is too small or too large, the WP-700-AS cannot be mounted in the wall. Be sure to make an opening with dimensions given above when mounting.

83.5 [3.29"]
103~116 [4.06"~4.57"]
46~60 [1.81"~2.36"]

Unit: mm (Inch)