


SEAMLESS CONNECT

Universal dvLED Floor-to-Ceiling Mount

The SEAMLESS Connect Universal Series by Peerless-AV® offers a versatile lineup of substructures for environments where wall mounting is not an option. Purpose-built for dvLED video walls and all-in-one displays, the SEAMLESS Connect Universal Floor-to-Ceiling Mount supports full system weight with strength and stability. Its slim, space-saving design simplifies setup and speeds up installation. The quad post leveling base and ceiling-attach bracket ensure a plumb structure and a perfectly flat mounting surface for dvLED installation - Ideal for corporate lobbies, retail, hospitality, showrooms, events, and entertainment spaces.

- Adaptable solution for installations where mounting direct to a wall is not an option
- Slim, space saving design fits neatly in any installation environment
- Lightweight aluminum frame makes shipping, handling and installation easier
- Anodized aluminum finish for a durable, decorative appearance
- Modular design provides scalability in installation configuration and size
- Integrated cable management protects, contains and conceals cables for a clean, professional installation
- Compatible with all SEAMLESS Connect Universal mounts, offering peace of mind when designing solutions or if project specs change
- Optional trim kit accessory (LEDTK) offers compatibility with most displays

Contact a Peerless-AV® Sales Representative for the current list of compatible latching dvLED display models.

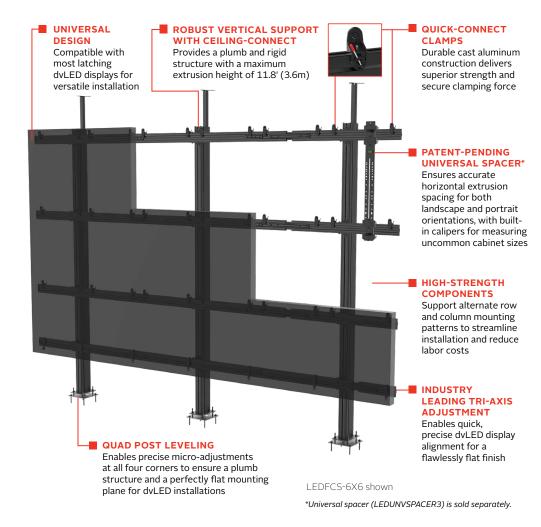



Cart/Trolley LEDMTS-6X6 shown



Floor Stand LEDESS-6X6 shown



Bolt-Down Pedestal LEDBDS-6X6 shown



Floor-to-Wall Mount LEDEWS-6X6 shown

Please visit peerless-av.com/en-us/patents for patent information.



Model Numbers WARRANTY: 5 Years

LEDFC Models SEAMLESS Connect Universal dvLED Floor-to-Ceiling Mount

LEDFCS – for dvLED displays up to 610mm wide LEDFCM – for dvLED displays up to 1220mm wide LEDFCL – for dvLED displays up to 1220mm wide

Product Specifications


•					
UNIVERSAL SPACER*	DIMENSIONS (W x H x D) PRODUCT WEIGHT LOAD CAPACITY		LOAD CAPACITY	FINISH AVAILABLE COLORS	
LEDUNVSPACER3	55.55" x 3.94" x 2.50" (1411 x 100 x 64mm)	x 3.94" x 2.50" (1411 x 100 x 64mm) 4lb (1.8kg)		Powder Coat	Black
PRECONFIGURED MODELS					
LEDFCS-4x4 LEDFCS-5x5 LEDFCS-6x6 LEDFCS-8x8	96.06" x 96.22"-115.12" x 8.19" (2440 x 2444-2924 x 208mm) 120.08" x 96.22"-115.12" x 8.19" (3050 x 2444-2924 x 208mm) 144.02" x 96.22"-115.12" x 8.19" (3660 x 2444-2924 x 208mm) 192.13" x 119.84"-138.74" x 8.19" (4880 x 3044-3524 x 208mm)	108lb (49.1kg) 133lb (60.5kg) 175lb (79.5kg) 299lb (135.9kg)	400lb (181.8kg) 625lb (284.1kg) 900lb (409.1kg) 1600lb (727.3kg)		Black
LEDFCM-3x3 LEDFCM-4x4 LEDFCM-5x5	113.38" x 96.22"-115.12" x 8.19" (2880 x 2444-2924 x 208mm) 151.18" x 96.22"-115.12" x 8.19" (3840 x 2444-2924 x 208mm) 188.97" x 119.84"-138.74" x 8.19" (4800 x 3044-3524 x 208mm)	112lb (50.9kg) 209lb (95.0kg) 228lb (103.6kg)	315lb (143.2kg) 560lb (254.5kg) 875lb (397.7kg)	Anodized, Powder Coat	
LEDFCL-2x2 LEDFCL-3x3 LEDFCL-4x4	96.06" x 96.22"-115.12" x 8.19" (2440 x 2444-2924 x 208mm) 144.09" x 96.22"-115.12" x 8.19" (3660 x 2444-2924 x 208mm) 192.13" x 119.84"-138.74" x 8.19" (4880 x 3044-3524 x 208mm)	104lb (47.3kg) 168lb (76.4kg) 287lb (130.5kg)	400lb (181.8kg) 900lb (409.1kg) 1600lb (727.3kg)		

Package Specifications

.				1	
UNIVERSAL SPACER*	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
LEDUNVSPACER3	5.00" x 4.375" x 38.00" (127 x 111 x 965mm)	9.5lb (4.3kg)	735029276173	Universal Spacer Kit	1
PRECONFIGURED MODELS	*Universal spacer (LEDUNVSPACER3) is sold separately.				
LEDFCS-4x4 LEDFCS-5x5 LEDFCS-6x6 LEDFCS-8x8 LEDFCM-3x3 LEDFCM-4x4 LEDFCM-5x5	VARIES x VARIES x 72.375" (VARIES x VARIES x 1838mm) VARIES x VARIES x 72.375" (VARIES x VARIES x 1838mm) VARIES x VARIES x 72.375" (VARIES x VARIES x 1838mm) VARIES x VARIES x 72.375" (VARIES x VARIES x 1838mm) VARIES x VARIES x 72.375" (VARIES x VARIES x 1838mm) VARIES x VARIES x 72.375" (VARIES x VARIES x 1838mm) VARIES x VARIES x 72.375" (VARIES x VARIES x 1838mm) VARIES x VARIES x 72.375" (VARIES x VARIES x 1838mm)	138lb (62.7kg) 163lb (74.1kg) 205lb (93.2kg) 329lb (149.5kg) 142lb (64.5kg) 239lb (108.6kg) 258lb (117.3kg)	735029358237 735029358244 735029358251 735029358268 735029358275 735029358282 735029358299	dvLED Display Mount, Subframe, Floor Anchors and Ceiling Attach Bracket	1
LEDFCL-2x2 LEDFCL-3x3 LEDFCL-4x4	VARIES X VARIES X 72.375 (VARIES X VARIES X 1838mm) VARIES X VARIES X 72.375" (VARIES X VARIES X 1838mm) VARIES X VARIES X 72.375" (VARIES X VARIES X 1838mm) VARIES X VARIES X 72.375" (VARIES X VARIES X 1838mm)	134lb (60.9kg) 198lb (90.0kg) 317lb (144.1kg)	735029358299 735029358305 735029358312 735029358329	and Coming Attach Bracket	

Accessories LEDTK Models: SEAMLESS Connect Universal dVLED Trim Kit

All dimensions = inch (mm)



MODEL NO.	DIMENSION "A"	DIMENSION "B"	DIMENSION "C" (MIN.) DIMENSION "D" (MAX.)
LEDFCS-4x4	8.19" (208mm)	96.06" (2440mm)	96.22" (2444mm) — 115.12" (2924mm)
LEDFCS-5x5		120.08" (3050mm)	96.22" (2444mm) — 115.12" (2924mm)
LEDFCS-6x6		144.09" (3660mm)	96.22" (2444mm) — 115.12" (2924mm)
LEDFCS-8x8		192.13" (4880mm)	119.84" (3044mm) — 138.74" (3524mm)
LEDFCM-3x3		113.38" (2880mm)	96.22" (2444mm) — 115.12" (2924mm)
LEDFCM-4x4		151.18" (3840mm)	96.22" (2444mm) — 115.12" (2924mm)
LEDFCM-5x5		188.97" (4800mm)	119.84" (3044mm) — 138.74" (3524mm)
LEDFCL-2x2		96.06" (2440mm)	96.22" (2444mm) — 115.12" (2924mm)
LEDFCL-3x3		144.09" (3660mm)	96.22" (2444mm) — 115.12" (2924mm)
LEDFCL-4x4		192.13" (4880mm)	119.84" (3044mm) — 138.74" (3524mm)

LEDFCS-6x6 Shown

Dimension B as fully expanded.

Horizontal Extrusions can be cut to length as needed.

Peerless-AV Latin America

Av. de las Industrias 413

Architect Specifications

The SEAMLESS Connect Universal dvLED Floor-to-Ceiling Mount shall be a Peerless-AV LEDFC models and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, kiosks, display mounts, projector mounts, carts/stands, and a full assortment of accessories. Peerless-AV 2300 White Oak Circle Aurora, IL 60502 USA

(800) 865-2112 (630) 375-5100 Peerless-AV EMEA Unit 2 Curo Park Frogmore, St. Albans Hertfordshire, AL2 2DD

United Kingdom +44 (0) 1923 200 100 Peerless-AV B.V. Papendorpseweg 75 3528 BJ Utrecht

3528 BJ Útrecht Parque Industrial Escobedo
The Netherlands General Escobedo, N.L.,
México, 66062

+31 (0) 70 770 8037

Peerless W®

+52 (81) 8384-8300